

20 25

PRODUCT CATALOGUE

SONGUL AYDINLATMA INS MOB GIDA SAN VE DIS TIC LTD STI

Tel: +90 212 609 24 25

Email: fatih@songulaydinlatma.com disticaret@songulaydinlatma.com

Web: <http://www.songulaydinlatma.com> www.songullini.com


Add: Habipler mahallesi Eski Edirne Asf. No:937 SULTANGAZİ/İSTANBUL /Turkey



WE ARE COMMITTED TO
RESEARCH

HUMAN HEALTH LIGHT ENVIRONMENT

We are dedicated to the research of healthy lighting environments for humans, continually optimizing and iterating our products to meet the individual needs of our customers. We provide the market with comprehensive solutions for healthy lighting environments that are suitable for business, industry, residence, and everyday life, thereby promoting sustainable development in the lighting industry.



PREMIUM HOTEL




LUXURY VILLA



MUSEUM



COMMERCIAL COMPLEX



OFFICE

CONTENTS

ABOUT US	00
VANGO SERIES	01
EURO SERIES	03
LEAP SERIES	09
STARS SERIES	11
PINELLIA SERIES	13
TACIT SERIES	14
STAR-MOON SERIES	15
MOON SERIES	17
RADIANCE SERIES	19
GRILLE SERIES	21
PULO SERIES	23

BOYA SERIES	25
FLAME SERIES	29
KOPA SERIES	33
TUBA SERIES	35
MINGHE SERIES	37
MAGIC CUBE SERIES	39
FLEX SERIES	41
FLAT SERIES	45
DEFT SERIES	49
DAINTY SERIES	53
OFFICE LIGHTING SERIES	55
STAIR LAMP SERIES	69

A masterpiece, meticulously crafted for you

Boasting a novel optical design, it showcases exceptional lighting effects with remarkable light quality. Its multifunctional structural design integrates spotlight and wall-washing lighting functions, breaking through traditional forms.



168 001-55
LED Source: LED
Power: 5W / 7W / 9W
Beam: 8° / 12° / 24° / 36° / 50° / wall washer
CCT: 2700K / 3000K / 3500K / 4000K / 5000K / tunnable2700-6000K
Cutout: ϕ 55mm
Dimension: ϕ 60xH75mm
Color: black / white / grey
CRI: > 90



168 002-55
LED Source: LED
Power: 5W / 7W / 9W
Beam: 8° / 12° / 24° / 36° / 50° / wall washer
CCT: 2700K / 3000K / 3500K / 4000K / 5000K / tunnable2700-6000K
Cutout: ϕ 55mm
Dimension: ϕ 80xH75mm
Color: black / white
CRI: > 90



168 001-75
LED Source: LED
Power: 5W / 7W / 9W / 12W / 15W
Beam: 3° / 8° / 12° / 24° / 36° / 50° / wall washer / 8° -40° Zooms
CCT: 2700K / 3000K / 3500K / 4000K / 5000K / tunnable2700-6000K
Cutout: ϕ 75mm
Dimension: ϕ 82xH92mm
Color: black / white
CRI: > 90



168 002-75
LED Source: LED
Power: 5W / 7W / 9W / 12W / 15W
Beam: 3° / 8° / 12° / 24° / 36° / 50° / wall washer / 8° -40° Zooms
CCT: 2700K / 3000K / 3500K / 4000K / 5000K / tunnable2700-6000K
Cutout: ϕ 75mm
Dimension: ϕ 103xH92mm
Color: black / white
CRI: > 90



512 138
LED Source: LED COB
Power: 5W / 7W / 9W
Beam: 12° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension: ϕ 53xH80
Color: black / white
CRI: > 90



512 138-1
LED Source: LED COB
Power: 5W / 7W / 9W
Beam: 12° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension: ϕ 53xH80
Color: black / white
CRI: > 90




512 139
LED Source: LED COB
Power: 5W / 7W / 9W / 12W / 15W
Beam: 12° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension: ϕ 53xH90
Color: black / white
CRI: > 90



512 139-1
LED Source: LED COB
Power: 5W / 7W / 9W / 12W / 15W
Beam: 12° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension: ϕ 53xH90
Color: black / white
CRI: > 90

EURO

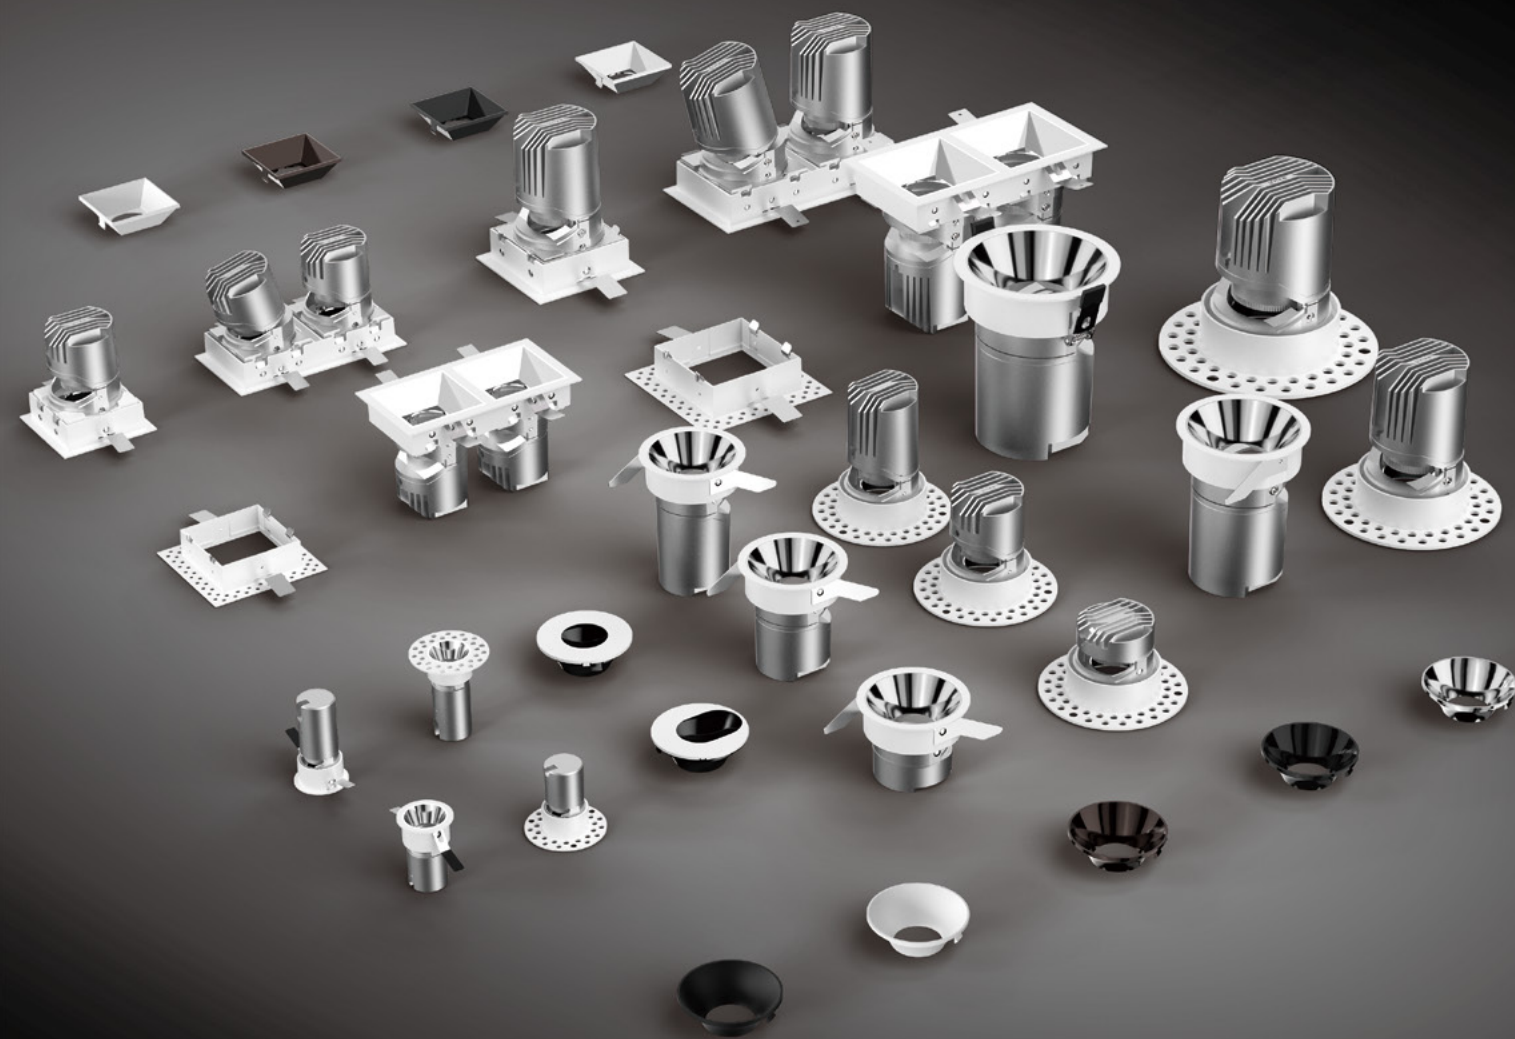


Expert in Lighting for Five-Star Hotels


Fashionable design, imported COB light source, TIR reverse osmosis light control technology, and black light anti-glare technology all contribute to its naturally high aesthetics, quality, and performance. With outstanding optical performance, excellent lamp body structure design, and an efficient cooling system, it boasts superior performance while also solving the cumbersome issues of installation and construction. This has helped many designers win design awards both domestically and internationally.



OPTIONS

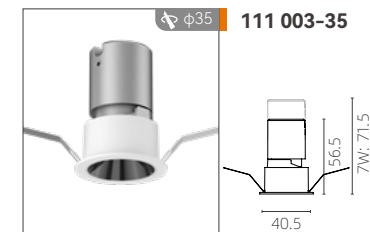

111 003-35
LED Source: LED COB
Power: 3W / 5W / 7W
Beam: 8° / 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 35$ mm
Dimension: 3W / 5W : $\phi 40.5 \times H 56.5$ mm
7W : $\phi 40.5 \times H 71.5$ mm
Color: black / white
CRI: > 90

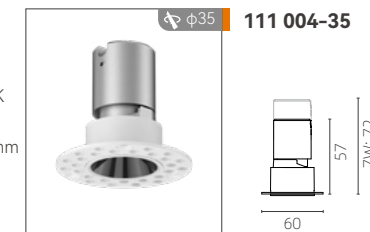

111 004-35
LED Source: LED COB
Power: 3W / 5W / 7W
Beam: 8° / 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 35$ mm
Dimension: 3W / 5W : $\phi 60 \times H 57$ mm
7W : $\phi 60 \times H 72$ mm
Color: black / white
CRI: > 90




111 013-1
LED Source: LED COB
Power: 3W / 5W / 7W / 9W
Beam: 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 55$ mm
Dimension: $\phi 60 \times H 75$ mm
Color: black / white
CRI: > 90



111 014-1
LED Source: LED COB
Power: 3W / 5W / 7W / 9W
Beam: 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 55$ mm
Dimension: $\phi 80 \times H 80$ mm
Color: black / white
CRI: > 90



111 003-1S
LED Source: LED COB
Power: 3W / 5W / 7W / 9W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 65$ mm
Color: black / white
CRI: > 90

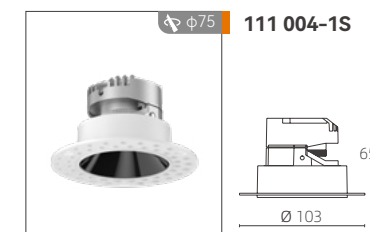

111 004-1S
LED Source: LED COB
Power: 3W / 5W / 7W / 9W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 65$ mm
Color: black / white
CRI: > 90



111 003-2S
LED Source: LED COB
Power: 3W / 5W / 7W / 9W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 65$ mm
Color: black / white
CRI: > 90



111 004-2S
LED Source: LED COB
Power: 3W / 5W / 7W / 9W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 65$ mm
Color: black / white
CRI: > 90




111 003-3S
LED Source: LED COB
Power: 3W / 5W / 7W / 9W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 65$ mm
Color: black / white
CRI: > 90



111 004-3S
LED Source: LED COB
Power: 3W / 5W / 7W / 9W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 65$ mm
Color: black / white
CRI: > 90


OPTIONS






111 003-1

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 91.5$ mm
Color: black / white
CRI: > 90




111 004-1

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 91.5$ mm
Color: black / white
CRI: > 90




111 003-2

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 91.5$ mm
Color: black / white
CRI: > 90




111 004-2

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 91.5$ mm
Color: black / white
CRI: > 90




111 003-3

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 91.5$ mm
Color: black / white
CRI: > 90




111 004-3

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 91.5$ mm
Color: black / white
CRI: > 90




111 003-1L

LED Source: LED COB
Power: 9W / 12W / 15W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 116$ mm
Color: black / white
CRI: > 90




111 004-1L

LED Source: LED COB
Power: 9W / 12W / 15W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 116$ mm
Color: black / white
CRI: > 90



111 003-2L

LED Source: LED COB
Power: 5W / 7W / 9W / 15W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 116$ mm
Color: black / white
CRI: > 90




111 004-2L

LED Source: LED COB
Power: 5W / 7W / 9W / 15W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 116$ mm
Color: black / white
CRI: > 90


OPTIONS






111 003-3L

LED Source: LED COB
Power: 5W / 7W / 9W / 15W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000
Cutout: $\phi 75$ mm
Dimension: $\phi 84 \times H 116$ mm
Color: black / white
CRI: > 90




111 004-3L

LED Source: LED COB
Power: 5W / 7W / 9W / 15W
Beam: 3° / 8° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H 116$ mm
Color: black / white
CRI: > 90




113 003-1

LED Source: LED COB
Power: 15W / 18W / 20W / 25W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 95$ mm
Dimension: $\phi 105 \times H 135$ mm
Color: black / white
CRI: > 90



113 004-1

LED Source: LED COB
Power: 15W / 18W / 20W / 25W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 95$ mm
Dimension: $\phi 130 \times H 135$ mm
Color: black / white
CRI: > 90




115 003-1

LED Source: LED COB
Power: 20W / 25W / 30W / 35W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 4000K / 5000K
Cutout: $\phi 125$ mm
Dimension: $\phi 138 \times H 162$ mm
Color: black / white
CRI: > 90




OPTIONS






112 003-1

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: 75x75mm
Dimension: L86xW86xH98mm
Color: black / white
CRI: > 90




112 004-1

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: 75x75mm
Dimension: L101xW101xH98mm
Color: black / white
CRI: > 90




112 023-1

LED Source: LED COB
Power: 5W*2 / 7W*2 / 9W*2 / 12W*2
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: 155x75mm
Dimension: L163.5xW86xH98mm
Color: black / white
CRI: > 90




114 023-1

LED Source: LED COB
Power: 15W*2 / 18W*2 / 20W*2 / 25W*2
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: 195x95mm
Dimension: L210xW110xH147mm
Color: black / white
CRI: > 90



114 003-1

LED Source: LED COB
Power: 15W / 18W / 20W / 25W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: 95x95mm
Dimension: L110xW110xH147mm
Color: black / white
CRI: > 90



114 004-1

LED Source: LED COB
Power: 15W / 18W / 20W / 25W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: 95x95mm
Dimension: L130xW130xH147mm
Color: black / white
CRI: > 90

TOP-TIER CONFIGURATION


Professional-grade TIR (Total Internal Reflection) lens
Triple light control technology
BVT micro-optical film imported from the USA



LEAP


Leap towards dreams, create beauty.

The years flow slowly,
All the efforts are only for the companionship and beauty of that lifetime.




169 001-55

LED Source: LED COB
Power: 5W / 7W / 9W
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: $\phi 55$ mm
Dimension: $\phi 61 \times H80$ mm
Color: black / white
CRI: > 90




169 002-55

LED Source: LED COB
Power: 5W / 7W / 9W
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: $\phi 55$ mm
Dimension: $\phi 80 \times H80$ mm
Color: black / white
CRI: > 90




169 001-75

LED Source: LED COB
Power: 5W / 7W / 9W / 12W / 15W
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: $\phi 75$ mm
Dimension: $\phi 82 \times H85$ mm
Color: black / white
CRI: > 90




169 002-75

LED Source: LED COB
Power: 5W / 7W / 9W / 12W / 15W
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: $\phi 75$ mm
Dimension: $\phi 103 \times H85$ mm
Color: black / white
CRI: > 90




169 001-95

LED Source: LED COB
Power: 20W / 25W / 30W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: $\phi 95$ mm
Dimension: $\phi 102 \times H123$ mm
Color: black / white
CRI: > 90




169 002-95

LED Source: LED COB
Power: 20W / 25W / 30W
Beam: 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: $\phi 95$ mm
Dimension: $\phi 130 \times H123$ mm
Color: black / white
CRI: > 90




208 011-55

LED Source: LED COB
Power: 5W / 7W / 9W
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: 55x55mm
Dimension: 65xH80mm
Color: black / white
CRI: > 90




208 021-55

LED Source: LED COB
Power: 5Wx2 / 7Wx2 / 9Wx2
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: 55x135mm
Dimension: 145x65x80mm
Color: black / white
CRI: > 90




208 031-55

LED Source: LED COB
Power: 5Wx3 / 7Wx3 / 9Wx3
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: 55x215mm
Dimension: 225x65x80mm
Color: black / white
CRI: > 90




208 011-75

LED Source: LED COB
Power: 5W / 7W / 9W / 12W / 15W
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: 75x75mm
Dimension: 85xH85mm
Color: black / white
CRI: > 90




208 021-75

LED Source: LED COB
Power: 5Wx2 / 7Wx2 / 9Wx2 /
12Wx2 / 15Wx2
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: 75x175mm
Dimension: 185x85x85mm
Color: black / white
CRI: > 90



208 031-75


LED Source: LED COB
Power: 5Wx3 / 7Wx3 / 9Wx3 /
12Wx3 / 15Wx3
Beam: 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K /
4000K / 2700K-6000K
Cutout: 75x275mm
Dimension: 285x85x85mm
Color: black / white
CRI: > 90



Starlight is like poetry, shining brilliantly
Resembling the most enchanting whispers in the world, it can create its own realm and also transform
into a magnificent galaxy.
From every angle, it reflects boundless mystery and charm.



LED Source: LED SMD (24V)
Power: 1W
Beam: 20° / 36° / 60°
CCT: 2700K / 3000K / 3500K /
4000K / 6500K
Cutout: ϕ 15mm
Dimension: ϕ 17.5xH15mm
Color: black / white
CRI: > 90

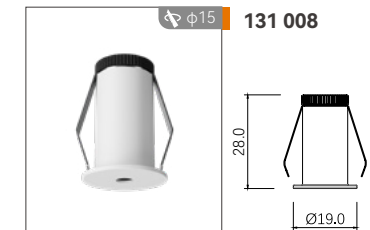

LED Source: LED SMD (24V)
Power: 1W
Beam: 36°
CCT: 2700K / 3000K / 3500K /
4000K / 6500K
Cutout: ϕ 15mm
Dimension: ϕ 19xH28mm
Color: black / white
CRI: > 90



LED Source: LED SMD (24V)
Power: 1W
Beam: 20° / 36° / 60°
CCT: 2700K / 3000K / 3500K /
4000K / 6500K
Cutout: ϕ 15mm
Dimension: ϕ 19xH28mm
Color: black / white
CRI: > 90



LED Source: LED SMD (24V)
Power: 1W
Beam: 20° / 36° / 60°
CCT: 2700K / 3000K / 3500K /
4000K / 6500K
Cutout: ϕ 15mm
Dimension: ϕ 19xH28mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: 3W / 5W
Beam: 8° - 50°
CCT: 2700K / 3000K / 3500K /
4000K / 5000K
Cutout: ϕ 45mm
Dimension: ϕ 50xH55.1mm
Color: black
CRI: > 90

PINELLIA

Halfway through summer, the flowers bloom, still beautiful.

That patch of summer flowers, like a dreamy spectacle, unfurls endless beauty.
May life be as radiant as summer flowers.

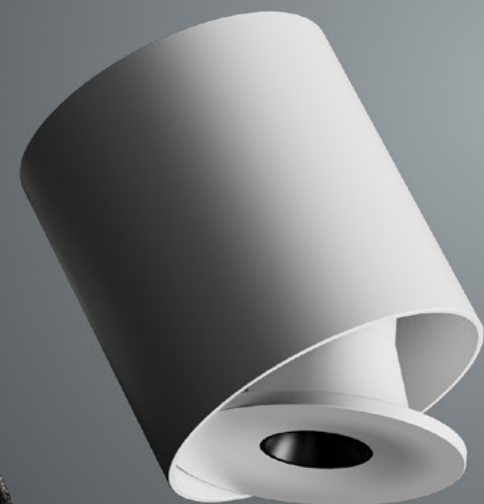


102 115-75B

LED Source: LED COB
Power: 5W / 7W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension: $\phi 70 \times H 73 \text{mm}$
Color: black / white
CRI: > 90




102 015-75B

LED Source: LED COB
Power: 5W / 7W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 75 \text{mm}$
Dimension: $\phi 81 \times H 58 \text{mm}$
Color: black / white
CRI: > 90

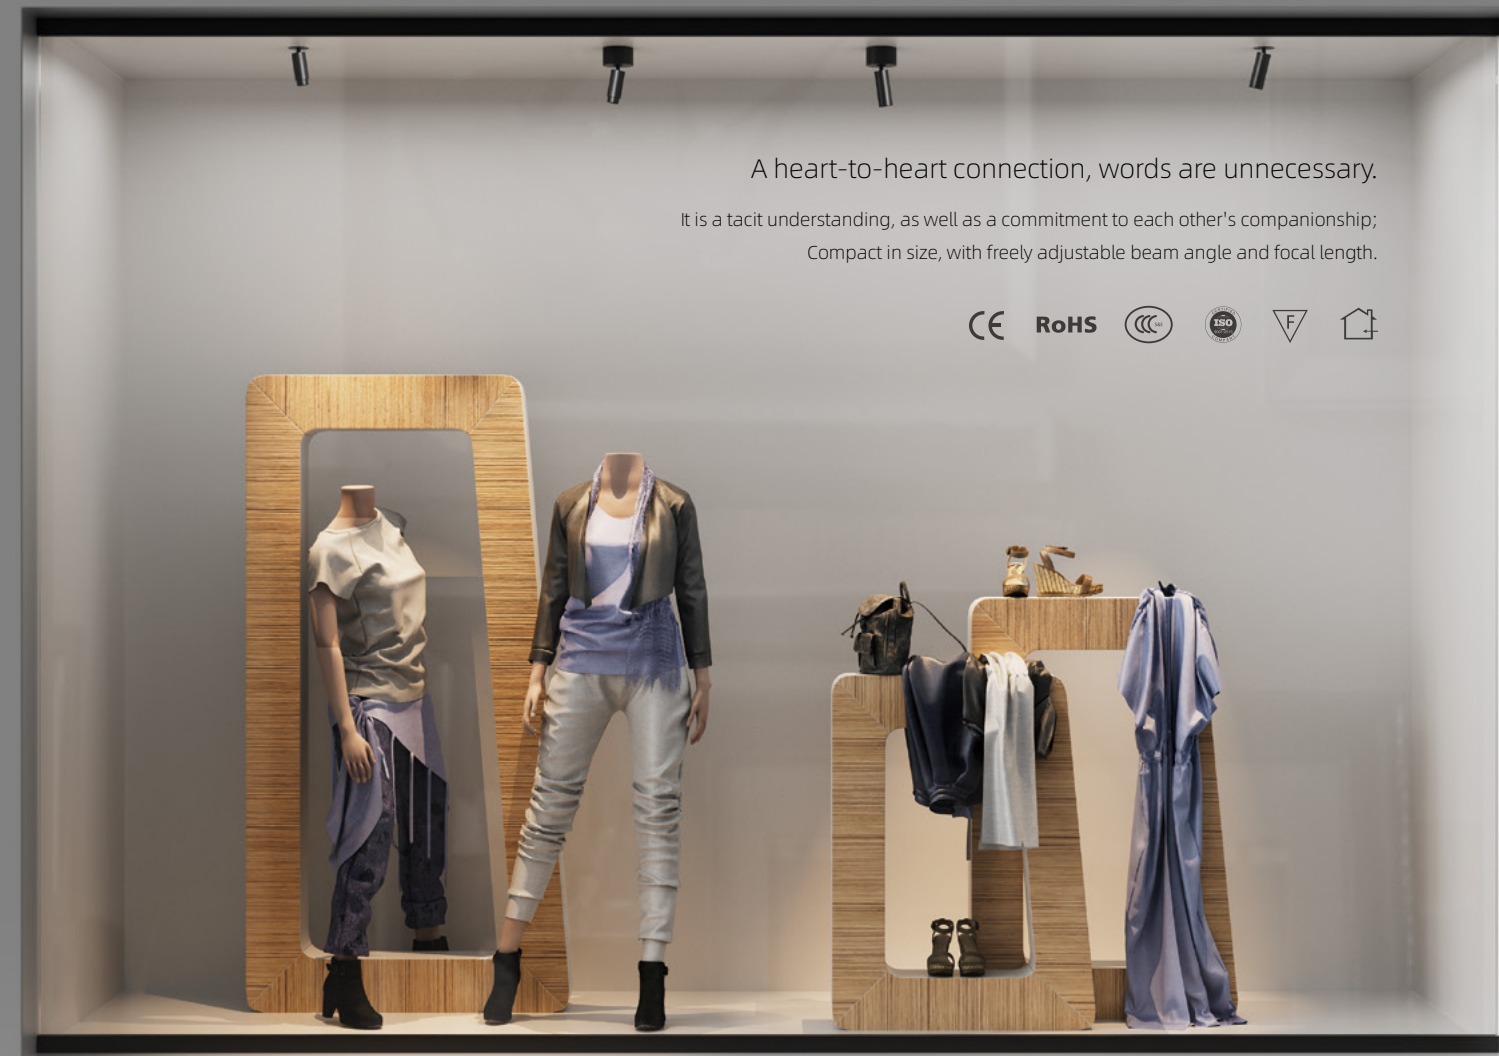


102 013-35

LED Source: LED COB
Power: 5W / 7W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 35 \text{mm}$
Dimension: $\phi 27.2 \times H 70 \text{mm}$
Color: black / white
CRI: > 90




102 013-35T

LED Source: LED COB
Power: 5W / 7W
Beam: 8° ~ 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 35 \text{mm}$
Dimension: $\phi 27.2 \times H 58.6 \text{mm}$
Color: black / white
CRI: > 90




102 113-35

LED Source: LED COB
Power: 5W / 7W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension: $\phi 27.2 \times H 70 \text{mm}$
Color: black / white
CRI: > 90



102 113-35T

LED Source: LED COB
Power: 5W / 7W
Beam: 8° ~ 50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 35 \text{mm}$
Dimension: $\phi 27.2 \times H 58.6 \text{mm}$
Color: black / white
CRI: > 90



STAR-MOON


Accompanied by stars and the moon, infinite beauty unfolds.

The night sky serves as a canvas, where stars and the moon interact brilliantly, bringing a sense of romance and wonderful moments to the darkness.





102 015-75

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 4° / 15° / 24° / 36° / 50°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 80 \times H 57.2$ mm
Color: black / white
CRI: > 90




102 015-75H

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 80 \times H 57.2$ mm
Color: black / white
CRI: > 90




102 015-75P

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 80 \times H 57.2$ mm
Color: black / white
CRI: > 90




102 015-75G

LED Source: LED COB
Power: 5W / 7W / 9W / 12W
Beam: 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 80 \times H 57.2$ mm
Color: black / white
CRI: > 90





102 015-75M

LED Source: LED COB
Power: 9W / 12W
Beam: 80° x 40°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 75$ mm
Dimension: $\phi 80 \times H 57.2$ mm
Color: black / white
CRI: > 90





Lamp to Lamp: 0.5m
Lamp to Mirror: 0.4m
Installing Height: 2.3±0.2m
Mirror to Ceiling ≤ 0.4m

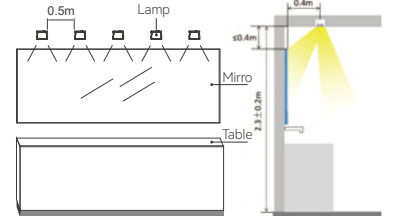


102 015-55

LED Source: LED
Power: 5W / 7W / 9W
Beam: 4° / 15° / 24° / 36° / 45°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 55$ mm
Dimension: $\phi 60 \times H 43.6$ mm
Color: black / white
CRI: > 90




102 015-55H

LED Source: LED COB
Power: 5W / 7W / 9W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 55$ mm
Dimension: $\phi 60 \times H 43.6$ mm
Color: black / white
CRI: > 90




102 015-55P

LED Source: LED COB
Power: 5W / 7W / 9W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 55$ mm
Dimension: $\phi 60 \times H 43.6$ mm
Color: black / white
CRI: > 90



102 015-55G

LED Source: LED COB
Power: 5W / 7W / 9W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K / 4000K / 5000K
Cutout: $\phi 55$ mm
Dimension: $\phi 60 \times H 43.6$ mm
Color: black / white
CRI: > 90





Powerful Core, Bright Space

Low heatsink with high power, customizable maximum output power up to 50W.
Aluminum alloy die-casting in one piece for excellent heat dissipation, sturdy and durable.
Qualified COB light source and TIR anti-osmosis light control technology for pure and natural lighting effects.



	118 001-3 LED Source: LED COB Power: 7W Beam: 36° / 60° CCT: 2700K / 3000K / 3500K / 4000K Cutout: $\phi 75$mm Dimension: $\phi 84 \times H 34$mm Color: black / white CRI: ≥ 90		118 001-4 LED Source: LED COB Power: 15W Beam: 36° / 60° CCT: 2700K / 3000K / 3500K / 4000K Cutout: $\phi 95$mm Dimension: $\phi 105 \times H 42$mm Color: black / white CRI: ≥ 90
	118 001-5 LED Source: LED COB Power: 20W Beam: 36° / 60° CCT: 2700K / 3000K / 3500K / 4000K Cutout: $\phi 125$mm Dimension: $\phi 136 \times H 50$mm Color: black / white CRI: ≥ 90		118 001-6 LED Source: LED COB Power: 30W Beam: 36° / 60° CCT: 2700K / 3000K / 3500K / 4000K Cutout: $\phi 150$mm Dimension: $\phi 162 \times H 58$mm Color: black / white CRI: ≥ 90
	118 001-8 LED Source: LED COB Power: 44W Beam: 36° / 60° CCT: 2700K / 3000K / 3500K / 4000K Cutout: $\phi 200$mm Dimension: $\phi 213 \times H 66$mm Color: black / white CRI: ≥ 90		
	118 006-6 LED Source: LED SMD Power: Max 30W Beam: 120° CCT: 2700K / 3000K / 3500K / 4000K Cutout: $\phi 150$mm Dimension: $\phi 162 \times H 50$mm Color: black / white CRI: ≥ 90		118 006-8 LED Source: LED SMD Power: Max 40W Beam: 120° CCT: 2700K / 3000K / 3500K / 4000K Cutout: $\phi 195$mm Dimension: $\phi 213 \times H 50$mm Color: black / white CRI: ≥ 90
	105 009 LED Source: LED COB Power: 9W Beam: 24° / 36° CCT: 2700K / 3000K / 3500K / 4000K Cutout: $\phi 75$mm Dimension: $\phi 83 \times H 36$mm Color: black / white CRI: ≥ 90	OPTIONS  Silver  Black  Pearl black  White	

RADIANCE




Clean Light, Comfortable Light


Integrated die-casting design, high-efficiency chips, and powerful heat dissipation ensure longer usage.

The high-transparency PC cover provides uniform and bright light transmission, with a panel that resists yellowing, ensuring lasting clean light color.


Fog-proof and anti-glare, providing a pleasant user experience.

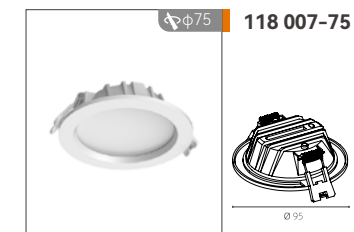

LED Source: LED COB
Power: 5W
Beam: 120°
CCT: 3000K / 4000K / 6000K
Cutout: $\phi 75\text{mm}$
Dimension: $\phi 95 \times \text{H}29\text{mm}$
Color: white
CRI: > 90

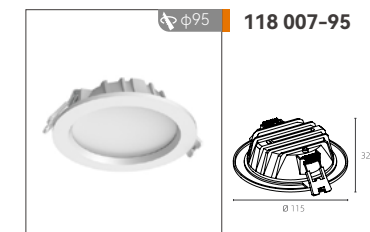


LED Source: LED COB
Power: 10W
Beam: 120°
CCT: 3000K / 4000K / 6000K
Cutout: $\phi 95\text{mm}$
Dimension: $\phi 115 \times \text{H}32\text{mm}$
Color: white
CRI: > 90

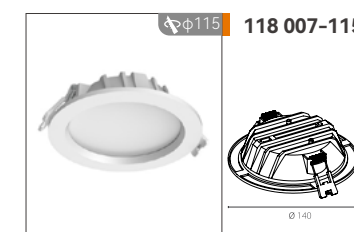

LED Source: LED COB
Power: 15W
Beam: 120°
CCT: 3000K / 4000K / 6000K
Cutout: $\phi 115\text{mm}$
Dimension: $\phi 140 \times \text{H}35\text{mm}$
Color: white
CRI: > 90



LED Source: LED COB
Power: 20W
Beam: 120°
CCT: 3000K / 4000K / 6000K
Cutout: $\phi 145\text{mm}$
Dimension: $\phi 180 \times \text{H}35\text{mm}$
Color: white
CRI: > 90

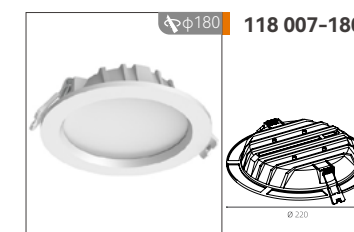


LED Source: LED COB
Power: 30W
Beam: 120°
CCT: 3000K / 4000K / 6000K
Cutout: $\phi 180\text{mm}$
Dimension: $\phi 220 \times \text{H}36\text{mm}$
Color: white
CRI: > 90

High-translucency PC cover

Uniform and bright light transmittance, panel resistant to yellowing, long-lasting and clean light color, anti-fog and anti-glare.

GRILLE

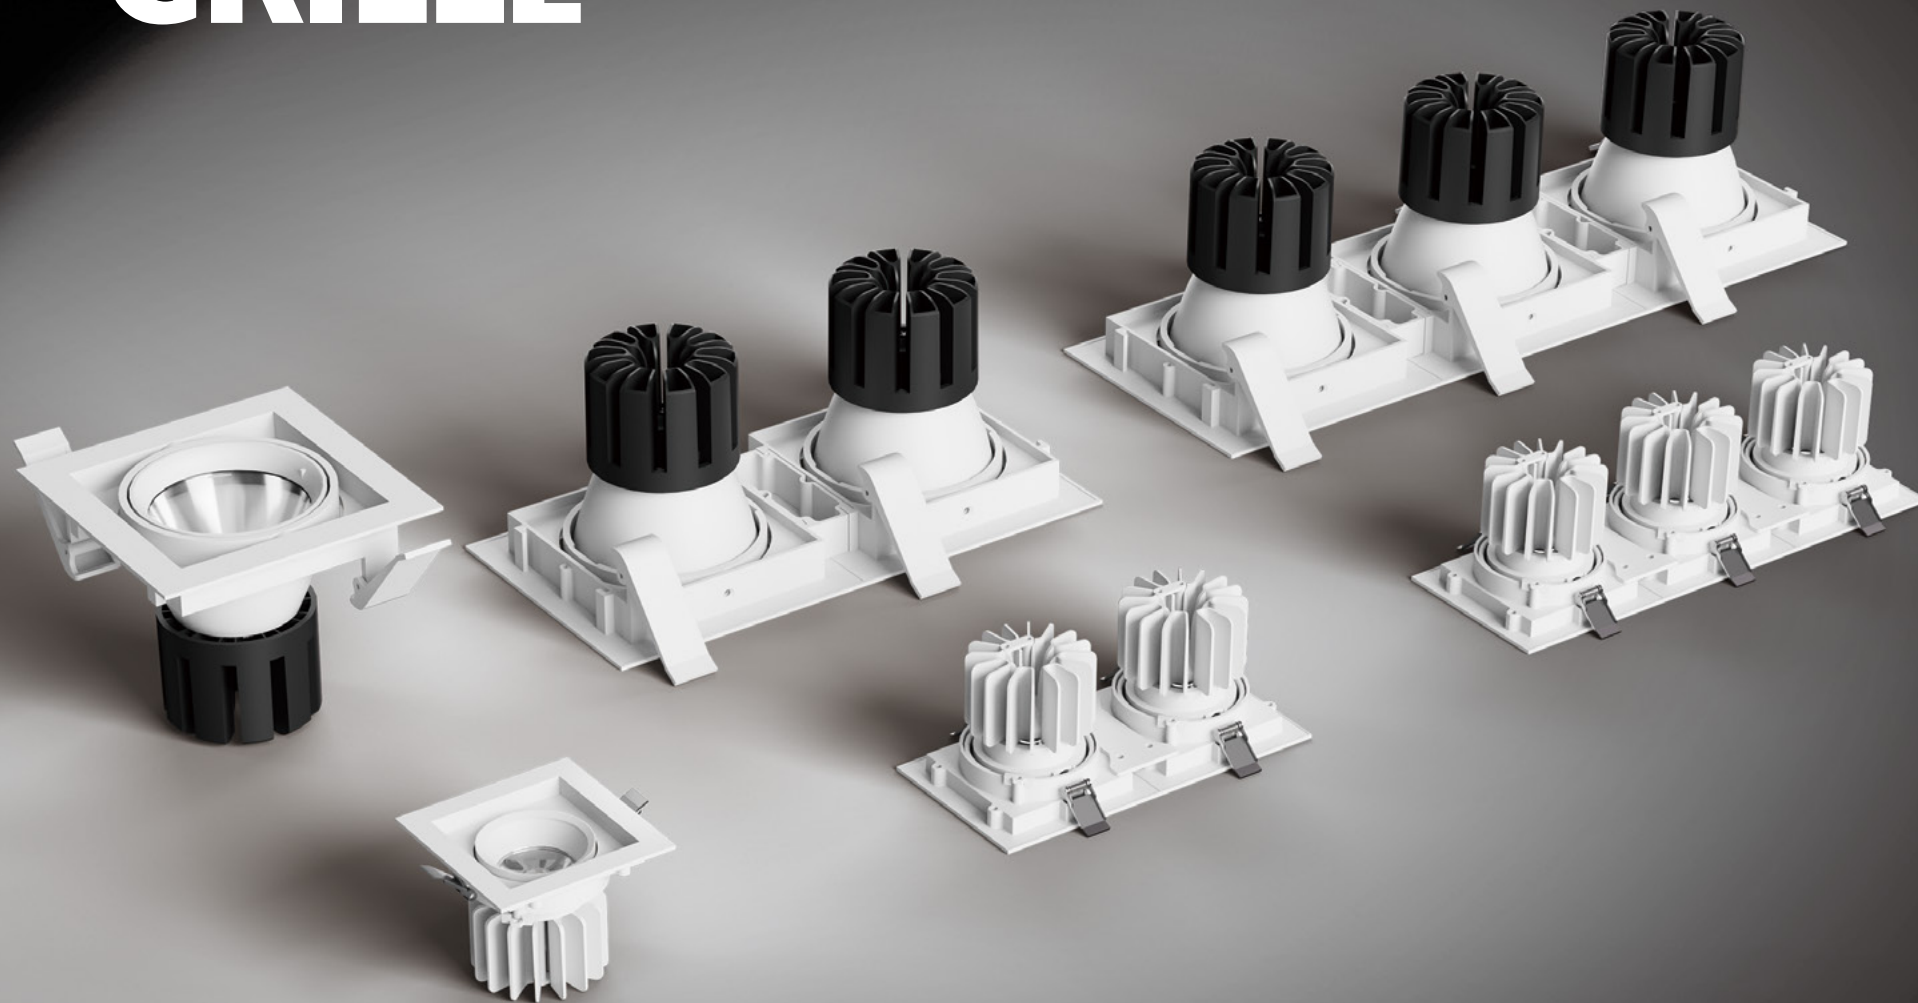

High efficiency and energy saving, comfortable experience

High-quality aluminum lamp body, efficient chip, excellent heat dissipation, energy-saving and long service life.
High-quality COB light source with high luminous efficiency, high color rendering index, and deep-set anti-glare design.
Flexible angle adjustment, easy installation, and diverse combination options.




	207 011-2 140*140 L 163 135	LED Source: LED COB Power: 40W Beam: 15° / 24° / 36° CCT: 2700K / 3000K / 3500K / 4000K Cutout: 140 X 140mm Dimension: L163xW163xH135mm Color: black / white CRI: > 90
	207 021-2 310*140 L 326 136	LED Source: LED COB Power: 40Wx2 Beam: 15° / 24° / 36° CCT: 2700K / 3000K / 3500K / 4000K Cutout: 310 X 140mm Dimension: L326xW163xH136mm Color: black / white CRI: > 90
	207 031-2 140*140 L 489 136	LED Source: LED COB Power: 40Wx3 Beam: 15° / 24° / 36° CCT: 2700K / 3000K / 3500K / 4000K Cutout: 470 X 140mm Dimension: L489xW163xH136mm Color: black / white CRI: > 90
	207 014 90*90 L 100 83	LED Source: LED COB Power: 15W Beam: 24° / 40° / 60° CCT: 2700K / 3000K / 3500K / 4000K Cutout: 90 X 90mm Dimension: L100xW100xH83mm Color: black / white CRI: > 90
	207 024 190*90 L 200 83	LED Source: LED COB Power: 15Wx2 Beam: 24° / 40° / 60° CCT: 2700K / 3000K / 3500K / 4000K Cutout: 190 X 90mm Dimension: L200xW100xH83mm Color: black / white CRI: > 90
	207 034 290*90 L 300 83	LED Source: LED COB Power: 15Wx3 Beam: 24° / 40° / 60° CCT: 2700K / 3000K / 3500K / 4000K Cutout: 290 X 90mm Dimension: L300xW100xH83mm Color: black / white CRI: > 90


90°

Unique design, efficient heat dissipation, with a vertical stretch of 90°


Within a compact space, harness greater power.
Durable and reliable, saving limitless energy.

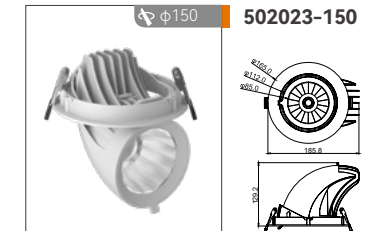

LED Source: LED COB
Power: 42W
Beam: 18° / 25° / 40° / 65°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: ϕ 150mm
Dimension: ϕ 165xH129.2mm
Color: black / white
CRI: > 90

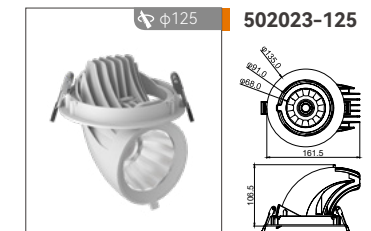

LED Source: LED COB
Power: 30W
Beam: 18° / 25° / 40° / 65°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: ϕ 125mm
Dimension: ϕ 161.5xH106.5mm
Color: black / white
CRI: > 90

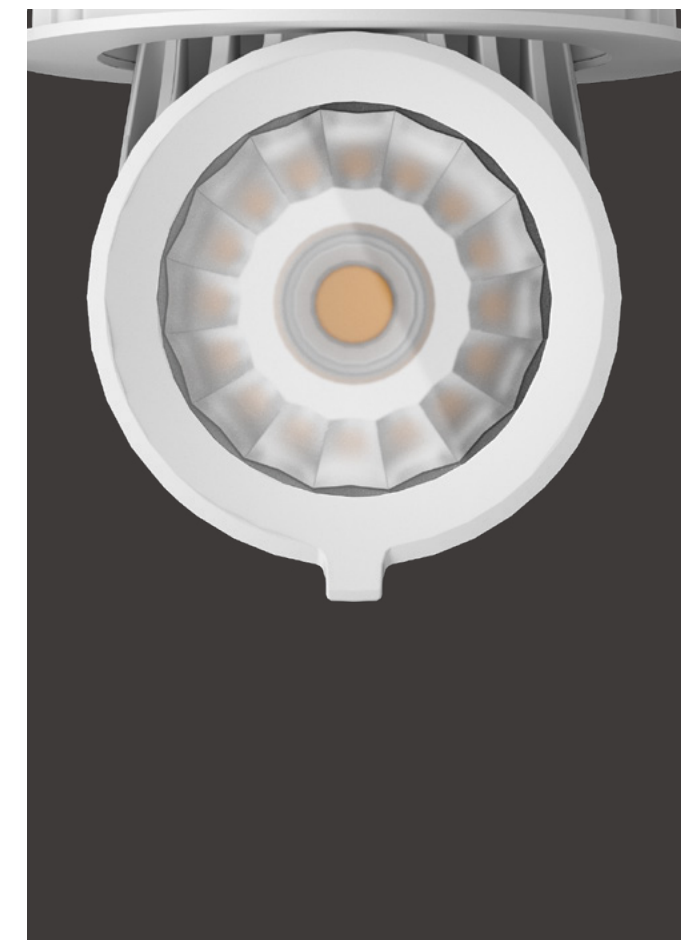



The Light of Art, A Journey of Civilization

High-quality COB light source, featuring high efficiency and high color rendering index;
Fixed-focus lens combined with zoom lens, Miro silver segment reflector, and anti-glare
dark light technology, professional optics delivering an artistic and monumental experience .
Multiple optical focal length modes and rotatable design cater to the diverse lighting needs
of exhibition and display spaces.

A variety of installation methods including track, surface-mounted, and recessed, as well
as optical accessories, are suitable for different venue requirements.



Adaptation: Lens/Convex Lens



Honeycomb



stretch



masking blade



345 201-80

LED Source: LED COB
Power: MAX 25W
Beam: 15° / 24° / 36° / 45° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H117 \text{mm}$
Color: black / white
CRI: > 90



345 202-80

LED Source: LED COB
Power: MAX 25W
Beam: 24° / 36° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H138 \text{mm}$
Color: black / white
CRI: > 90



345 201-80T

LED Source: LED COB
Power: MAX 25W
Beam: 12°-50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H154 \text{mm}$
Color: black / white
CRI: > 90



345 202-80T

LED Source: LED COB
Power: MAX 25W
Beam: 20° — 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H140 \text{mm}$
Color: black / white
CRI: > 90



345 201-105

LED Source: LED COB
Power: MAX 42W
Beam: 15°/24°/38°/60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H125 \text{mm}$
Color: black / white
CRI: > 90



345 202-105

LED Source: LED COB
Power: MAX 42W
Beam: 16°/24°/36°/45°/60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H149 \text{mm}$
Color: black / white
CRI: > 90



345 201-105T

LED Source: LED COB
Power: MAX 42W
Beam: 12°-36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H125 \text{mm}$
Color: black / white
CRI: > 90



345 202-105T

LED Source: LED COB
Power: MAX 42W
Beam: 20° — 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H160 \text{mm}$
Color: black / white
CRI: > 90




345 201-105A


LED Source: LED COB
Power: MAX 30W
Beam: Wall Washing
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H139 \text{mm}$
Color: black / white
CRI: > 90

OPTIONS


Adaptation: Lens/Convex Lens



Adaptation: Full range




LED Source: LED COB
Power: MAX 20W
Beam: 15° / 24° / 36° / 45° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 105$ mm
Dimension: $\phi 115 \times H100$ mm
Color: black / white
CRI: > 90



LED Source: LED COB
Power: MAX 20W
Beam: 24° / 36° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 105$ mm
Dimension: $\phi 115 \times H121$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 20W
Beam: 12°-50°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 105$ mm
Dimension: $\phi 115 \times H124$ mm
Color: black / white
CRI: > 90



LED Source: LED COB
Power: MAX 20W
Beam: 20° — 60°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 105$ mm
Dimension: $\phi 115 \times H124$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 35W
Beam: 15° / 24° / 38° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 135$ mm
Dimension: $\phi 80 \times H138$ mm
Color: black / white
CRI: > 90



LED Source: LED COB
Power: MAX 35W
Beam: 16° / 24° / 36° / 45° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 135$ mm
Dimension: $\phi 145 \times H132$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 35W
Beam: 12°-36°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 135$ mm
Dimension: $\phi 145 \times H143$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 35W
Beam: 20° — 60°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 135$ mm
Dimension: $\phi 145 \times H143$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 30W
Beam: Wall Washing
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: $\phi 135$ mm
Dimension: $\phi 145 \times H115$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 25W
Beam: 15° / 24° / 36° / 45° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H113$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 25W
Beam: 24° / 36° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H133$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 25W
Beam: 12°-50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H136$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 25W
Beam: 20° — 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H136$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 42W
Beam: 15° / 24° / 38° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H124$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 42W
Beam: 16° / 24° / 36° / 45° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H148$ mm
Color: black / white
CRI: > 90



LED Source: LED COB
Power: MAX 42W
Beam: 12°-36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H160$ mm
Color: black / white
CRI: > 90




LED Source: LED COB
Power: MAX 42W
Beam: 20° — 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H160$ mm
Color: black / white
CRI: > 90



LED Source: LED COB
Power: MAX 30W
Beam: Wall Washing
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 105 \times H131$ mm
Color: black / white
CRI: > 90

OPTIONS

Adaptation: Lens/Convex Lens




Adaptation: Full range






Stylish and aesthetic, a paradigm of art


Sleek and minimalist design, combined with professional optical technology, creates an artistic ambiance.
High-quality aluminum lamp body, efficient chip, excellent heat dissipation, energy-saving and environmentally friendly, with a long service life.
A variety of optical accessories and installation methods to meet the needs of different venues.

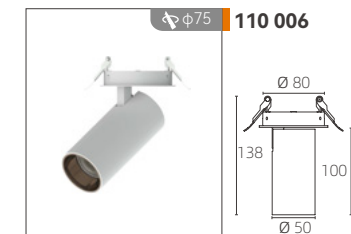


110 006
LED Source: LED COB
Power: 10W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: Ø75mm
Dimension: Ø50xH138mm
Color: black / white
CRI: > 90

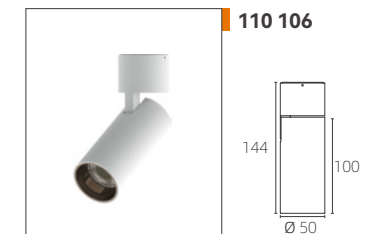

110 106
LED Source: LED COB
Power: 10W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: Ø50xH144mm
Color: black / white
CRI: > 90

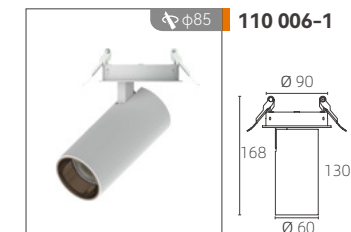


110 006-1
LED Source: LED COB
Power: 20W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: Ø85mm
Dimension: Ø60xH168mm
Color: black / white
CRI: > 90

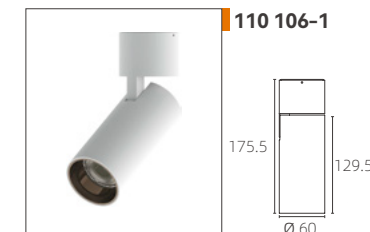

110 106-1
LED Source: LED COB
Power: 20W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: Ø60xH175.5mm
Color: black / white
CRI: > 90




110 006-2
LED Source: LED COB
Power: 30W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Cutout: Ø95mm
Dimension: Ø70xH188mm
Color: black / white
CRI: > 90

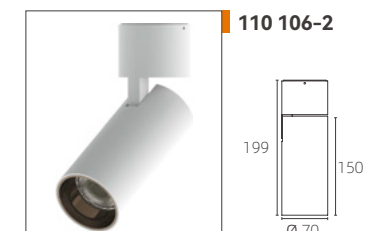

110 106-2
LED Source: LED COB
Power: 30W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: Ø70xH199mm
Color: black / white
CRI: > 90



310 207
LED Source: LED COB
Power: 10W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L162xH122mm
Color: black / white
CRI: > 90

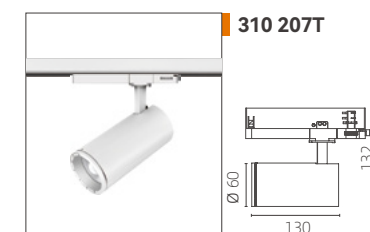


310 207T
LED Source: LED COB
Power: 10W
Beam: 20° ~ 50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: Ø60xL130mm
Color: black / white
CRI: > 90



310 207-1
LED Source: LED COB
Power: 20W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L162xH132mm
Color: black / white
CRI: > 90




310 207-1T
LED Source: LED COB
Power: 34W
Beam: 20° ~ 50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: Ø70xL150mm
Color: black / white
CRI: > 90

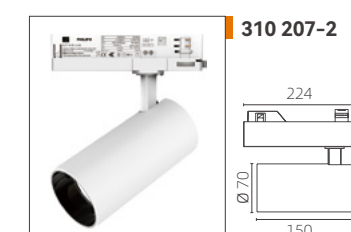

310 207-2
LED Source: LED COB
Power: 30W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L224xH142mm
Color: black / white
CRI: > 90




310 207-2T
LED Source: LED COB
Power: 42W
Beam: 20° ~ 50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: Ø85xL160mm
Color: black / white
CRI: > 90

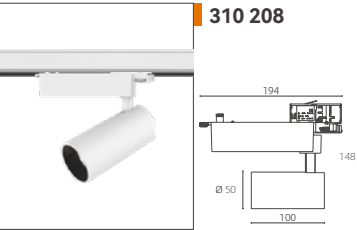


310 208

LED Source: LED COB
Power: Max 10W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L194xH148mm
Color: black / white
CRI: > 90

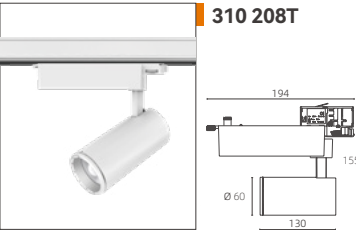


310 208T

LED Source: LED COB
Power: Max 10W
Beam: 20° ~ 50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L194xH155mm
Color: black / white
CRI: > 90

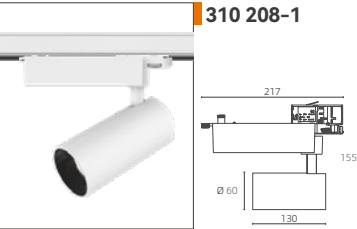


310 208-1

LED Source: LED COB
Power: Max 20W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L217xH155mm
Color: black / white
CRI: > 90

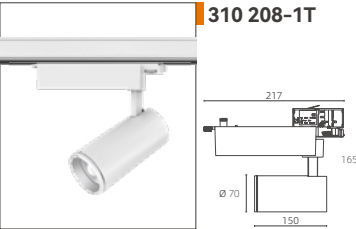


310 208-1T

LED Source: LED COB
Power: Max 34W
Beam: 20° ~ 50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L217xH165mm
Color: black / white
CRI: > 90

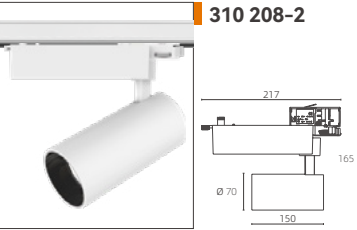

310 208-2

LED Source: LED COB
Power: Max 30W
Beam: 16° / 26° / 36°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L217xH165mm
Color: black / white
CRI: > 90

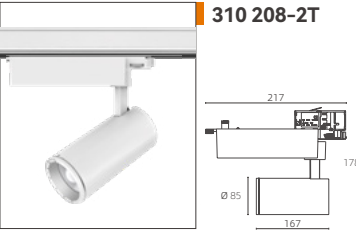

310 208-2T

LED Source: LED COB
Power: Max 42W
Beam: 20° ~ 50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: L217xH178mm
Color: black / white
CRI: > 90





KOPA track light series

with compact design and high efficiency alanoed reflector,
it is the best choise for shops, stores and supemarkets.
The lumiare looks clean and simple thanks to the screws invisible design,
it is also can be normal aluminus reflector with quite competitive price.



301 210

LED Source: LED COB
Power: MAX 25W
Beam: 16°/24°/36°/45°/60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 90 \times H160$ mm
Color: black / white
CRI: > 90



301 217

LED Source: LED COB
Power: MAX 20W
Beam: 15°/24°/40°/50°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 62 \times H185.3$ mm
Color: black / white
CRI: > 90



301 210-1

LED Source: LED COB
Power: MAX 32W
Beam: 16°/24°/36°/45°/60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 100 \times H161.3$ mm
Color: black / white
CRI: > 90



301 217-1

LED Source: LED COB
Power: MAX 30W
Beam: 24°/36°/60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H185.3$ mm
Color: black / white
CRI: > 90



301 210-2

LED Source: LED COB
Power: MAX 42W
Beam: 15°/24°/40°/60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 110 \times H169$ mm
Color: black / white
CRI: > 90




301 217-2

LED Source: LED COB
Power: MAX 42W
Beam: 15°/24°/36°/45°/60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 90 \times H188.05$ mm
Color: black / white
CRI: > 90




Simpler design, Better performance


The luminaire looks quite simple and slim thanks to the build-in driver.
The front ring is designed in fast assembly which can be attached to heatsink without tool.
Good thermal management thanks to the high pure ACD12 aluminum material.
Back cover with driver fixation positions makes the assembly easy and simple as well.




LED Source: LED COB
Power: MAX 15W
Beam: 15° / 24° / 38° / 45° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 62 \times H228.45$ mm
Color: black / white
CRI: > 90



LED Source: LED COB
Power: MAX 20W
Beam: 15° / 24° / 38° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 72 \times H248$ mm
Color: black / white
CRI: > 90



LED Source: LED COB
Power: MAX 30W
Beam: 15° / 24° / 38° / 60°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 80 \times H250$ mm
Color: black / white
CRI: > 90



LED Source: LED COB
Power: MAX 38W
Beam: 15° / 24° / 38° / 55°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 94 \times H252$ mm
Color: black / white
CRI: > 90

MINGHE

Minimalist style, fashionable concept

Simple design style, exceptional optical performance.
Simple yet sophisticated, transforming space into an art form.




Silver



White



Black



Golden




Nickel




512 133

LED Source: LED COB
Power: 20W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 95 \times H152$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65



512 133-1

LED Source: LED COB
Power: 20W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 95 \times H152$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65




512 134

LED Source: LED COB
Power: 30W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 115 \times H152$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65





512 134-1

LED Source: LED COB
Power: 30W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 115 \times H152$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65




512 135

LED Source: LED COB
Power: 40W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 140 \times H162$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65




512 135-1

LED Source: LED COB
Power: 40W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 140 \times H162$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65




512 136

LED Source: LED COB
Power: 50W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 170 \times H182$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65




512 136-1

LED Source: LED COB
Power: 50W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 170 \times H182$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65




512 137

LED Source: LED COB
Power: 80W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 205 \times H212$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65




512 137-1

LED Source: LED COB
Power: 80W
Beam: 20° / 40°
CCT: 2700K / 3000K / 3500K / 4000K
Dimension: $\phi 205 \times H212$ mm
Color: black / white
CRI: > 90
IP Rating: IP44 / IP65












MAGIC CUBE

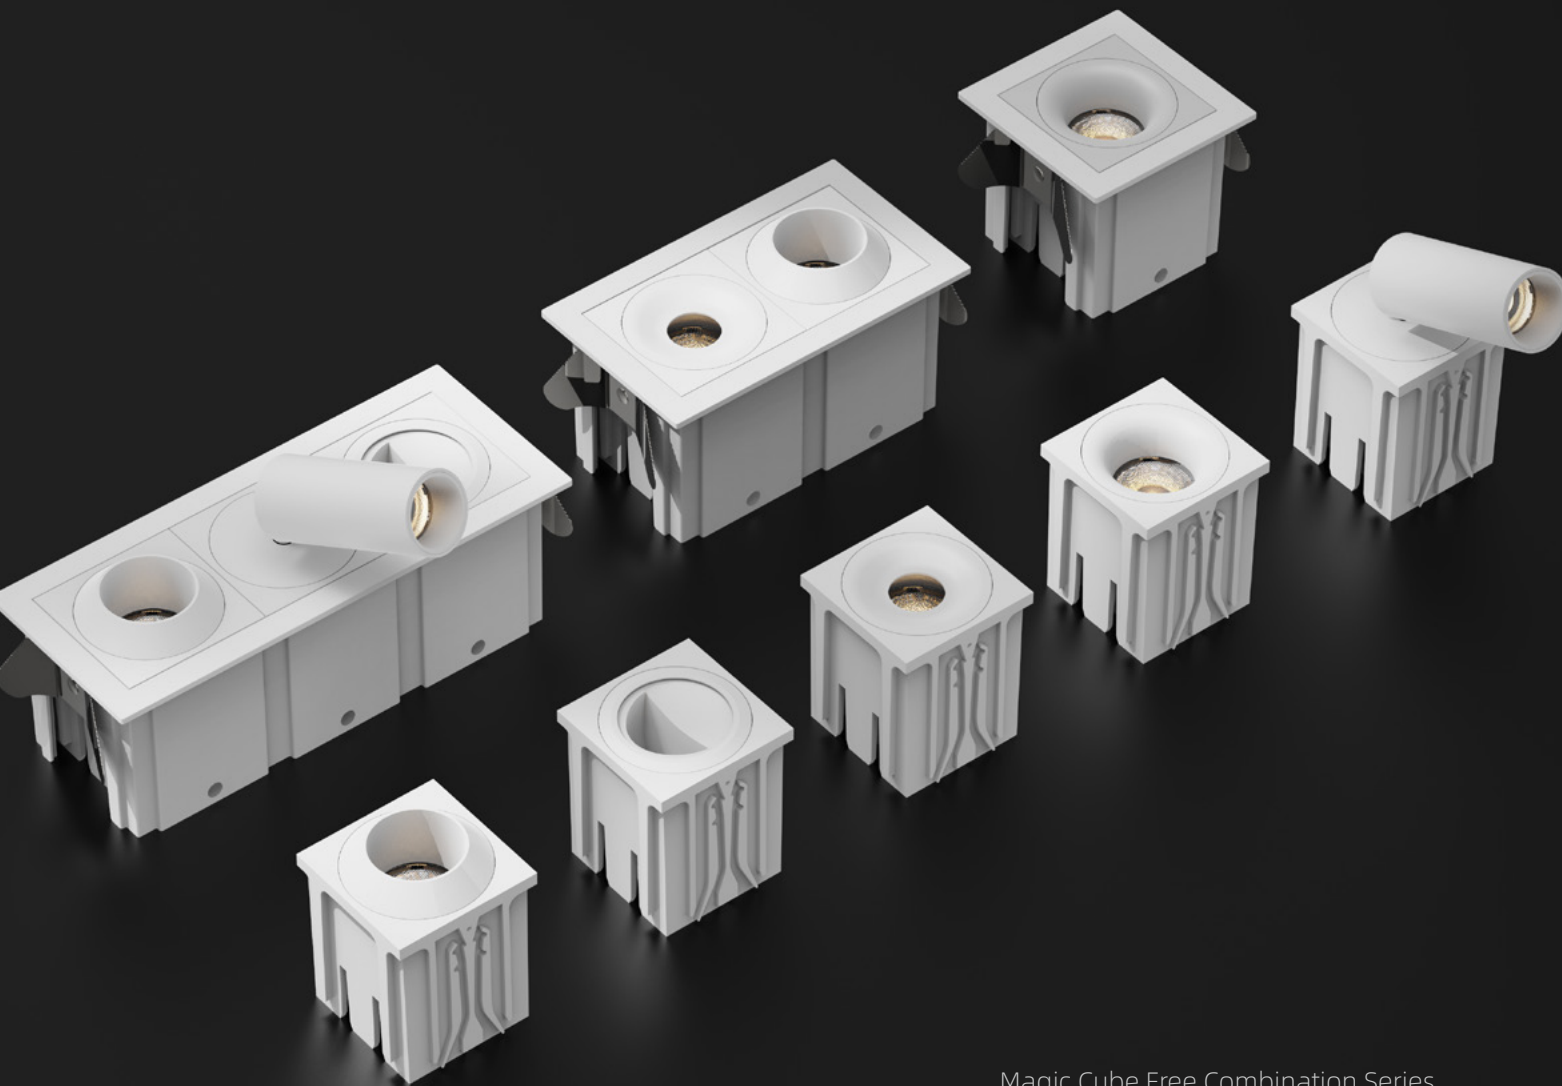

Magic Cube Free Combination Series

Push-and-test installation allows for free combination of light modules;
Multiple types of light modules cater to different usage environments.

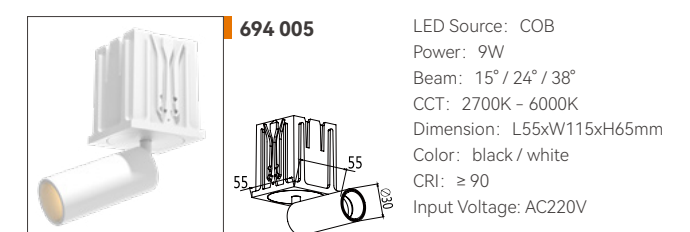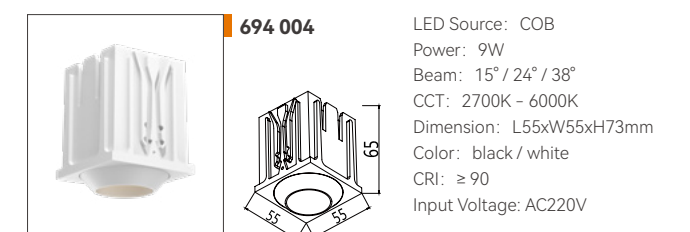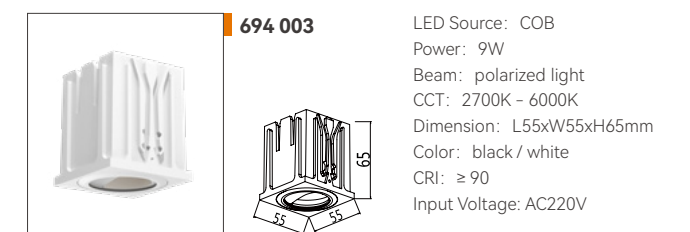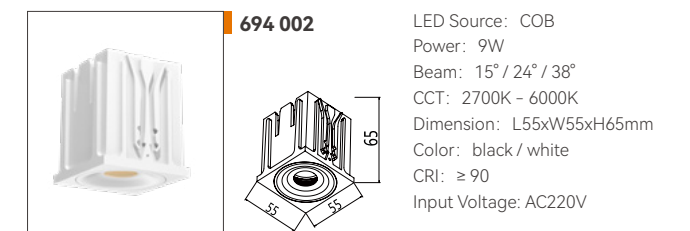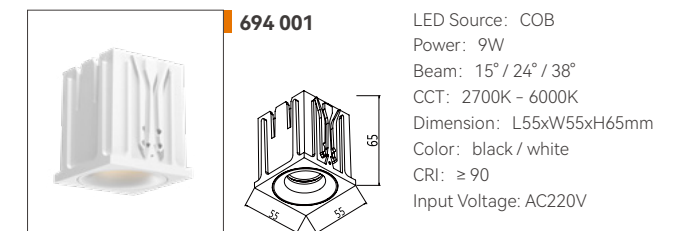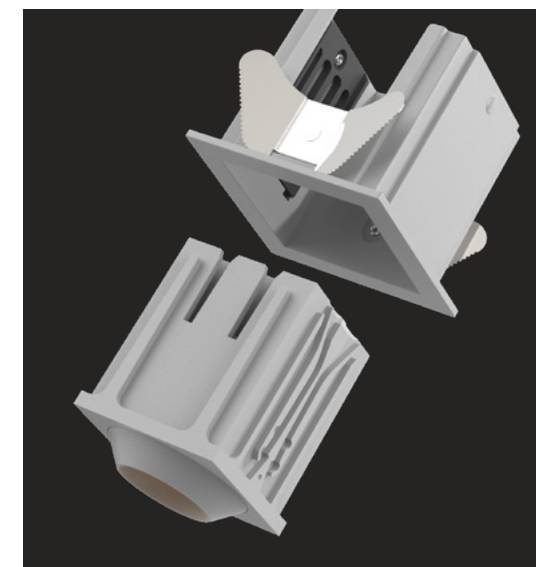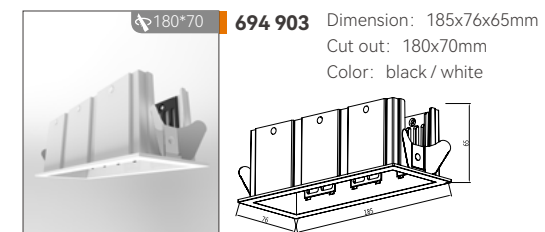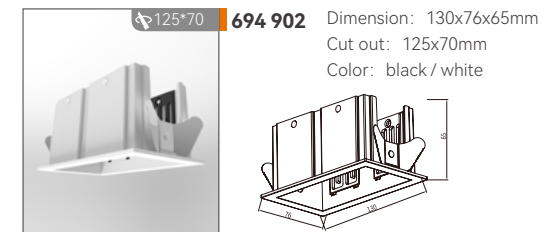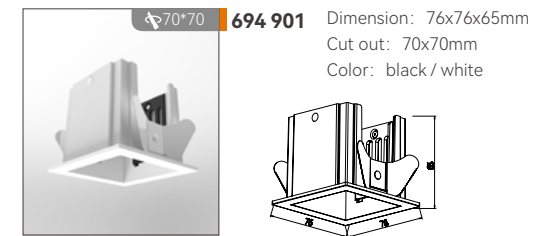



Freely mix and match, versatile design

Dozens of freely combinable forms allow for unrestrained spatial design. Unique card slot design, patented electrical wiring design at the bottom of the guide rail, and male-female plug technology ensure ease of use, stability, and durability. The delicate integrated track design achieves seamless splicing.




FLEX linear profile system

The delicate design of splicing parts truly achieves seamless splicing; 48V power supply with bottom conduction, ensuring safety and reliability; Guide rail accessories include male-female plugs, power cables, connectors, end caps, and wrenches, facilitating easy installation.





603 010

Dimension: 1000/2000 x85x55.1mm
Cut out: W48xH65mm
Color: black anodized
Input Voltage: DC 48V
Installation: recessed trim/trimless



A=48

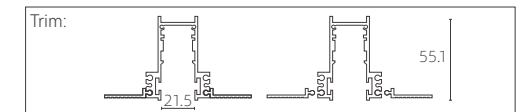
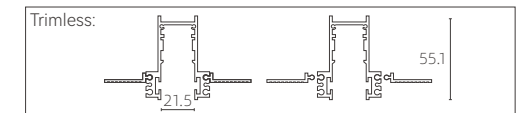


603 110

Dimension: 1000/2000x62.8x50.6mm
Color: black anodized
Input Voltage: DC 48V



Surface Bracket




603 310

Dimension: 1000/2000x62.8x50.6mm
Color: black anodized
Input Voltage: DC 48V





suspension wire






603 901

Dimension: 98x98x55mm
Color: black anodized
Application: recessed horizontal corner connection.




603 902

Dimension: 102.5x102.5x33mm
Color: black anodized
Application: recessed vertical corner connection.




603 903

Dimension: 100x100x55mm
Color: black anodized
Application: surface horizontal corner connection.




603 904

Dimension: 100x100x55mm
Color: black anodized
Application: surface vertical corner connection.




603 010B

Dimension: 1000/2000 x72.3x50mm
Cut out: W30xH65mm
Color: black anodized
Input Voltage: DC 48V



603 010B

Dimension: 1000/2000 x72.3x50mm
Cut out: W30xH65mm
Color: black anodized
Input Voltage: DC 48V





603 901B

Dimension: 100x100x55mm
Color: black anodized
Application: recessed horizontal corner connection.



603 902B

Dimension: 100x100x33mm
Color: black anodized
Application: recessed vertical corner connection



603 010C

Dimension: 1000/2000 x83.7x52mm
Cut out: W40xH65mm
Color: black anodized
Input Voltage: DC 48V



603 901C

Dimension: 100x100x55mm
Color: black anodized
Application: recessed horizontal corner connection.



603 902C

Dimension: 100x100x33mm
Color: black anodized
Application: recessed vertical corner connection



603 202

LED Source: LED Luminus COB
Power: 6W
Beam: 16° / 24° / 36°
CCT: 2700K - 6000K
Dimension: L186xW38.5xH103.4mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 203

LED Source: LED Luminus COB
Power: 9W
Beam: 16° / 24° / 36°
CCT: 2700K - 6000K
Dimension: L186xW50xH114.5mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 204

LED Source: LED Luminus COB
Power: 12W
Beam: 16° / 24° / 36°
CCT: 2700K - 6000K
Dimension: L186xW60xH125mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 211

LED Source: 2835
Power: 8W
Beam: 120°
CCT: 2700K - 6000K
Dimension: L387xW20xH40mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 212

LED Source: 2835
Power: 12W
Beam: 120°
CCT: 2700K - 6000K
Dimension: L579xW20xH40mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 213

LED Source: 2835
Power: 20W
Beam: 120°
CCT: 2700K - 6000K
Dimension: L963xW20xH40mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 222

LED Source: 3030 1-3W
Power: 10W
Beam: 12° / 34° / 55°
CCT: 2700K - 6000K
Dimension: L195xW20xH40mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 224

LED Source: 3030 1-3W
Power: 20W
Beam: 12° / 34° / 55°
CCT: 2700K - 6000K
Dimension: L387xW20xH40mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 241

LED Source: LED Luminus COB
Power: 6W
Beam: 16° / 24° / 36°
CCT: 2700K - 6000K
Dimension: L186xW38xH495mm
Color: black
CRI: > 90
Input Voltage: DC 48V




603 251

LED Source: 3030 1W
Power: 10W
Beam: 12° / 34° / 55°
CCT: 2700K - 6000K
Dimension: L195xW20mm
Color: black
CRI: > 90
Input Voltage: DC 48V



603 252

LED Source: 2835
Power: 10W
Beam: 120°
CCT: 2700K - 6000K
Dimension: L195xW20mm
Color: black
CRI: > 90
Input Voltage: DC 48V

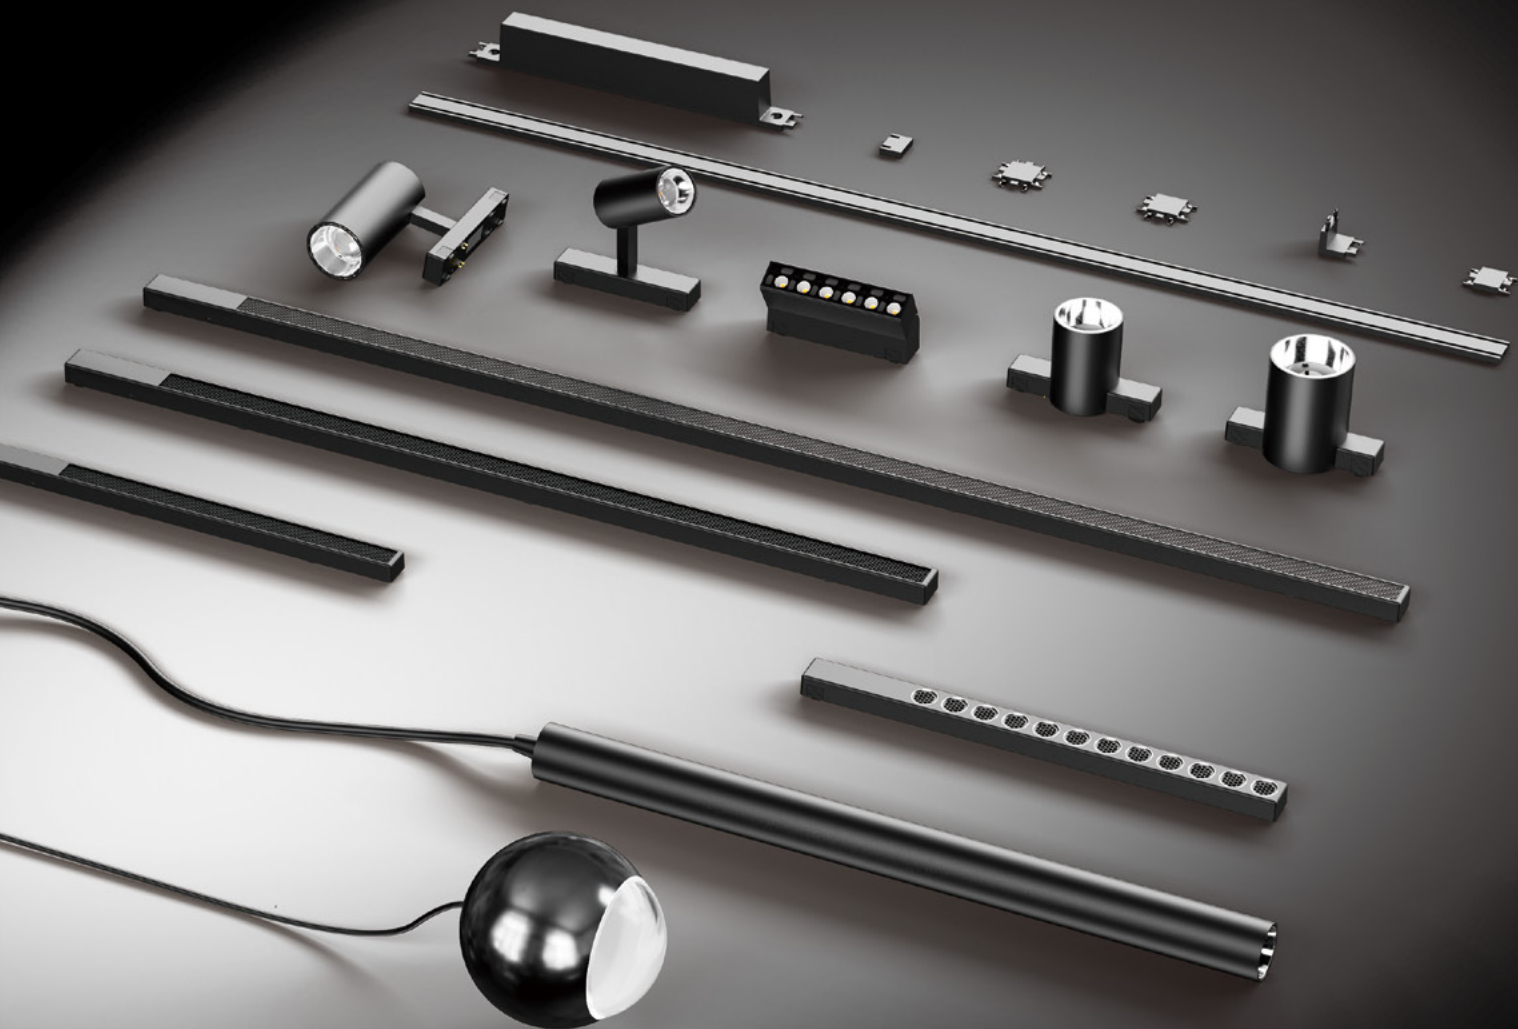

Ultra-thin design, versatile and power ful

5mm ultra-thin design, exquisite and beautiful.

A variety of combination methods, adapters, and lighting accessories to meet all application placements and lighting design needs.

Specifically developed for lighting upgrades in the retrofit market, it requires no ceiling suspension or trenching, featuring both magnetic and latching structures for safety, practicality, and convenience.





Ultra-thin Magnetic Track profile.



The profile thickness is only 5mm, as thin as a cicada's wing;
No need for ceiling installation or slot cutting, it can be directly fixed with screws, making it the preferred choice for retrofit projects;
Designed with clips and magnets for double fastening, ensuring a more secure installation of lighting fixtures.





608 110 / 608 120 Dimension: 1000/2000x25x5mm
Color: black
Input Voltage: DC 24V

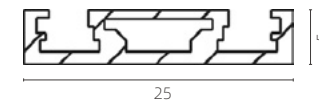



608 901 Dimension: 20x25x5.5mm
Color: black
Application: straight connection.





608 902 Dimension: 20x25x5.5mm
Color: black
Application: horizontal corner connection.




608 903 Dimension: 20x25x5.5mm
Color: black
Application: vertical corner connection.




608 904 Dimension: 20x25x5.5mm
Color: black
Application: cross connection.




608 905 Dimension: 20x25x5.5mm
Color: black
Application: T connection.




608 906 Dimension: 18x25x5.5mm
Color: black
Application: end cap.




608 907 Dimension: 121x25x21mm
Color: black
Application: junction box of power supply.



608 908 Dimension: 286x25x39mm
Color: black
Power: 200W
Application: power supply module.



608 201 LED Source: LED COB
Power: 6W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L122xW38.5xH75mm
Color: black
CRI: > 90
Input Voltage: DC 24V 300mA





608 202

LED Source: LED COB
Power: 9W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L122xW50xH87mm
Color: black
CRI: > 90
Input Voltage: DC 24V 450mA



608 231

LED Source: LED COB
Power: 6W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: φ50xH68.5mm
Color: black / red / golden
CRI: > 90
Input Voltage: DC 24V 300mA



608 232

LED Source: LED COB
Power: 9W
Beam: 15° / 24° / 36°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: φ60xH80mm
Color: black
CRI: > 90
Input Voltage: DC 24V 450mA



608 211

LED Source: 2835
Power: 6W
Beam: 120°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L378xW25xH15.5mm
Color: black
CRI: > 90
Input Voltage: DC 24V 300mA

Paired with
Honeycomb



608 212

LED Source: 2835
Power: 12W
Beam: 120°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L678xW25xH15.5mm
Color: black
CRI: > 90
Input Voltage: DC 24V 550mA



608 213

LED Source: 2835
Power: 18W
Beam: 120°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L378xW25xH15.5mm
Color: black
CRI: > 90
Input Voltage: DC 24V 850mA



608 221

LED Source: 3030 1W
Power: 12W
Beam: 24° / 40° / 60°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L333xW25xH15.5mm
Color: black
CRI: > 90
Input Voltage: DC 24V 550mA



608 241

LED Source: LED COB
Power: 6W
Beam: 16° / 24° / 36°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L111.6xφ38xH495.5mm
Color: black
CRI: > 90
Input Voltage: DC 24V 300mA



608 242

LED Source: 3030 1-3W
Power: 6W
Beam: 60°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L111.6xφ120mm
Color: golden/blue/white/
brown/pearl black/chrome
CRI: > 90
Input Voltage: DC 24V 300mA



608 251

LED Source: 3030 1W
Power: 6W
Beam: 24° / 36°
CCT: 2700K / 3000K / 3500K
4000K / 5500K
Dimension: L117xW25xH57mm
Color: black
CRI: > 90
Input Voltage: DC 24V 300mA






Compact and Elegant, Infinite Possibilities

13.5MM ultra-thin profile, without limitation by the height of ceiling;
Brushed aluminum with surface oxidation process, offering a delicate and beautiful texture;
Nearly twenty types of commonly used lamps and accessories to mix and match, creating versatile designs to meet various personalized needs.




	691 010 Dimension: 1000/2000x54x13.5mm Cut out: W20mm Color: black Input Voltage: DC 48V Accs: end cap & cover 		691 110 Dimension: 1000/2000x18x13.5mm Color: black Input Voltage: DC 48V Accs: end cap & cover
	691 310 Dimension: 1000/2000x23x16.5mm Color: black Input Voltage: DC 48V Accs: end cap & cover 		691 911 Power: 60W Dimension: 240x13.4x17mm Color: black
	691 912 Dimension: R300mm Color: black Input Voltage: DC 48V 		691 201 LED Source: HL 3535 Power: 3W Beam: 15° / 24° / 36° CCT: 2700K-6000K Dimension: φ24mm Color: black CRI: ≥ 90 Input Voltage: DC 48V
	691 202 LED Source: HL 3535 Power: 5W Beam: 15° / 24° / 36° CCT: 2700K-6000K Dimension: φ24mm Color: black CRI: ≥ 90 Input Voltage: DC 48V 		691 203 LED Source: HL COB Power: 7W Beam: 15° / 24° / 36° CCT: 2700K-6000K Dimension: φ30mm Color: black CRI: ≥ 90 Input Voltage: DC 48V
	691 211 LED Source: 2835 Power: 6W Beam: 120° CCT: 2700K-6000K Dimension: 303x13.9x11.7mm Color: black CRI: ≥ 90 Input Voltage: DC 48V 		691 212 LED Source: COB Power: 9W Beam: 120° CCT: 2700K-6000K Dimension: 603x13.9x11.7mm Color: black CRI: ≥ 90 Input Voltage: DC 48V

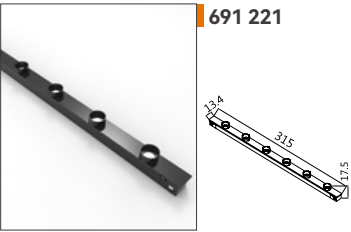


691 221

LED Source: 3030 6V 2W
Power: 7W, 9W, 11W
Beam: 15° / 24° / 36°
CCT: 2700K-6000K
Dimension: 315x13.9x17.5mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V

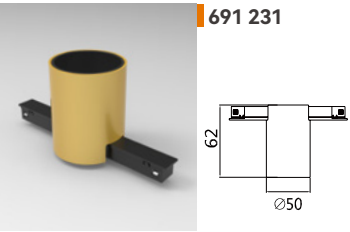


691 231

LED Source: COB
Power: 5W
Beam: 15° / 24° / 36°
CCT: 2700K-6000K
Dimension: Ø50xH62mm
Color: golden
CRI: ≥ 90
Input Voltage: DC 48V

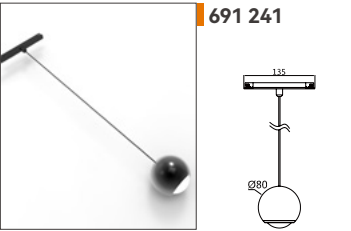


691 241

LED Source: COB
Power: 5W
Beam: 120°
CCT: 2700K-6000K
Dimension: Ø80mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V

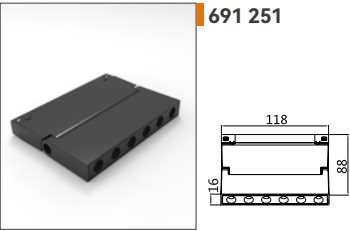


691 251

LED Source: 3030 6V 2W
Power: 5W
Beam: 15° / 24° / 36°
CCT: 2700K-6000K
Dimension: 118x16x88mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V

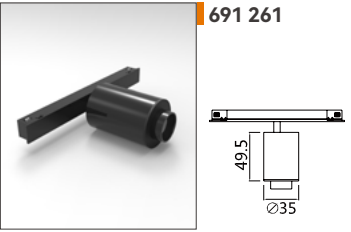


691 261

LED Source: 3535
Power: 5W
Beam: 10° – 60°
CCT: 2700K-6000K
Dimension: Ø35mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V

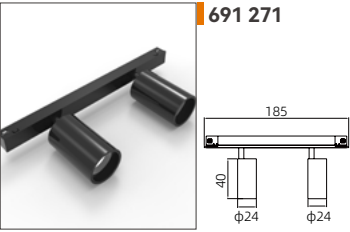


691 271

LED Source: 3535
Power: 2x3W
Beam: 15° / 24° / 36°
CCT: 2700K-6000K
Dimension: Ø24mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V

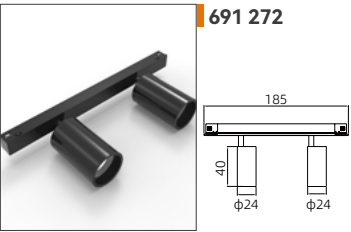


691 272

LED Source: 3535
Power: 2x5W
Beam: 15° / 24° / 36°
CCT: 2700K-6000K
Dimension: Ø24mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V

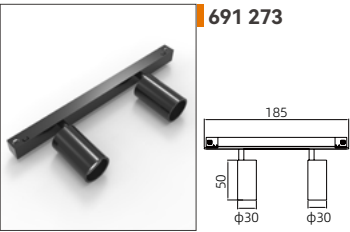


691 273

LED Source: 3535
Power: 2x7W
Beam: 15° / 24° / 36°
CCT: 2700K-6000K
Dimension: Ø30mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V

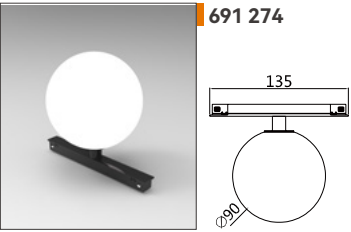

691 274

LED Source: G4
Power: 5W
Beam: 360°
CCT: 2700K-6000K
Dimension: Ø90mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V

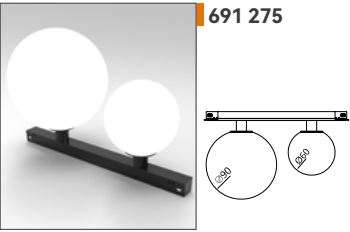

691 275

LED Source: G4
Power: 2x5W
Beam: 360°
CCT: 2700K-6000K
Dimension: Ø60mm+Ø90mm
Color: black
CRI: ≥ 90
Input Voltage: DC 48V




DAINTY

Delicately Clear and Gracefully Elegant


The crystal-clear lens not only serves as lighting but also as an ornament.
The pendant light allows for DIY customization of any desired shape,
resembling a gracefully elegant and beautifully dancing maiden, with diverse shapes and radiating charm.
The grill light features a unique push-button installation method for switching between two lighting modes freely.




171*42 **692 006**




LED Source: 3030
Power: 12W
Beam: 120°
CCT: 2700K-6000K
Dimension: 176x49x52mm
Cutout: 171x42mm
Color: black / white
CRI: ≥ 90
Input Voltage: AC220V - DC36V




171*42 **692 006-1**




LED Source: 3030
Power: 12W
Beam: 120°
CCT: 2700K-6000K
Dimension: 196x69x52mm
Cutout: 171x42mm
Color: black / white
CRI: ≥ 90
Input Voltage: AC220V - DC36V




692 101




LED Source: 2835
Power: 30W
Beam: 45° / 90°
CCT: 2700K-6000K
Dimension: φ520mm
Color: black / white
CRI: ≥ 90
Input Voltage: AC220V - DC36V




692 102



LED Source: 2835
Power: 40W
Beam: 45° / 90°
CCT: 2700K-6000K
Dimension: φ650mm
Color: black / white
CRI: ≥ 90
Input Voltage: AC220V - DC36V




692 301




LED Source: 2835
Power: 18W
Beam: 45° / 90°
CCT: 2700K-6000K
Dimension: φ650x1/4mm
Color: black
CRI: ≥ 90
Input Voltage: DC 24V




692 302



LED Source: 2835
Power: 30W
Beam: 45° / 90°
CCT: 2700K-6000K
Dimension: φ1050x1/4mm
Color: black
CRI: ≥ 90
Input Voltage: DC 24V




692 303



LED Source: 2835
Power: 36W
Beam: 45° / 90°
CCT: 2700K-6000K
Dimension: 942x30x31mm
Color: black
CRI: ≥ 90
Input Voltage: DC 24V




692 304




LED Source: 2835
Power: 48W
Beam: 45° / 90°
CCT: 2700K-6000K
Dimension: 1256x30x31mm
Color: black
CRI: ≥ 90
Input Voltage: DC 24V




692 305



LED Source: 2835
Power: 72W
Beam: 45° / 90°
CCT: 2700K-6000K
Dimension: 1884x30x31mm
Color: black
CRI: ≥ 90
Input Voltage: DC 24V



692 201



LED Source: 2835
Power: 36W
Beam: 45° / 90°
CCT: 2700K-6000K
Dimension: φ400xH2000mm
Color: black / white
CRI: ≥ 90
Input Voltage: DC 48V

HIGH-END OFFICE LIGHTING




Minimalist design with seamless connections, awakening people's pursuit and understanding of the essence of life in the purest way.
No light leakage, no glare, no dark areas, high luminous efficiency.



01:00 02:00 03:00 04:00 05:00 06:00 07:00 08:00 09:00 10:00 11:00 12:00 13:00 14:00 15:00 16:00 17:00 18:00 19:00 20:00 21:00 22:00 23:00 24:00

LINC

Enhance well-being in the workplace

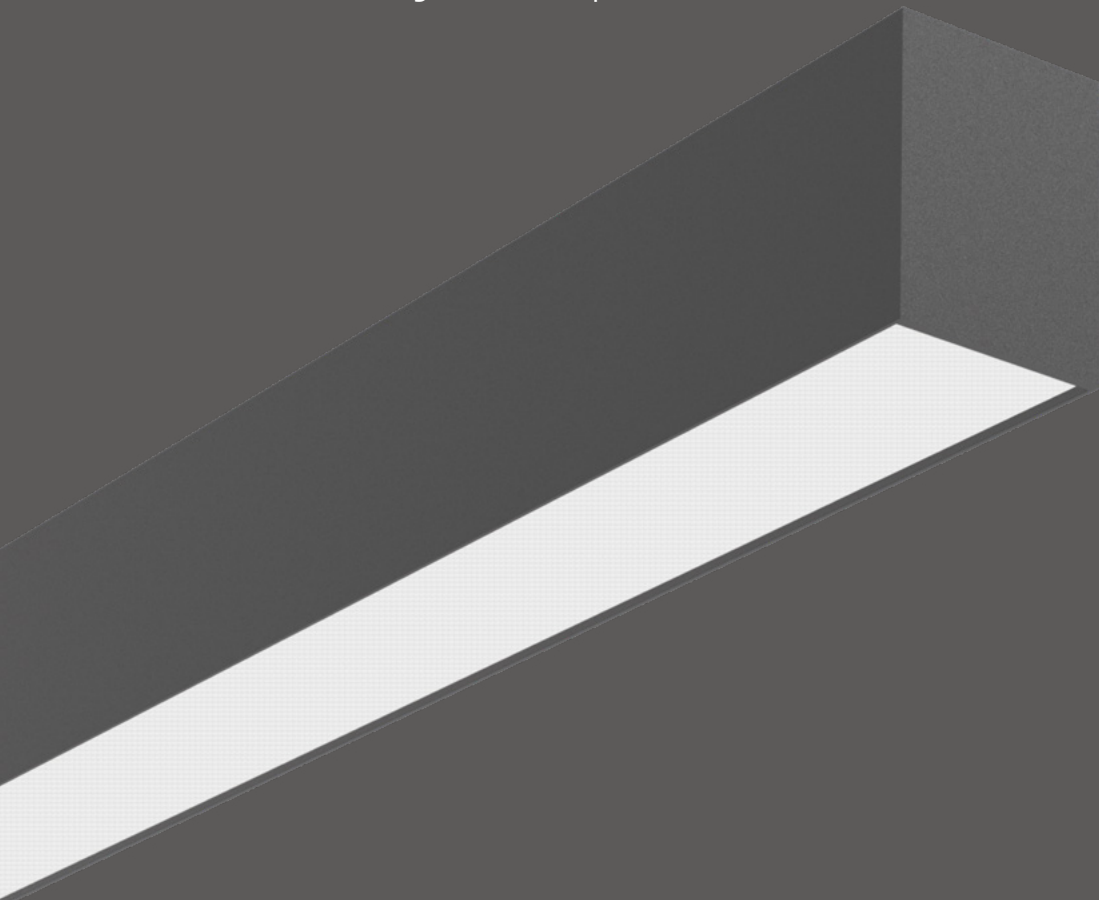


Conical prismatic diffuser

For standard-compliant workplace



Opal diffuser

For communication area

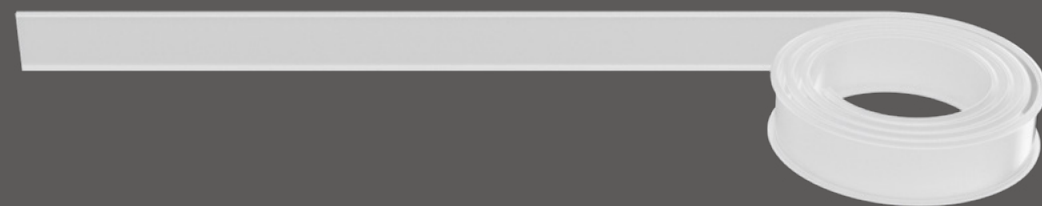


Seamless connection and continuous line.

Thanks to the innovative rollable diffuser and seamless connection of housings, LINC can be available in a continuous line without any light leakage.


PARA

Glare free and shining free

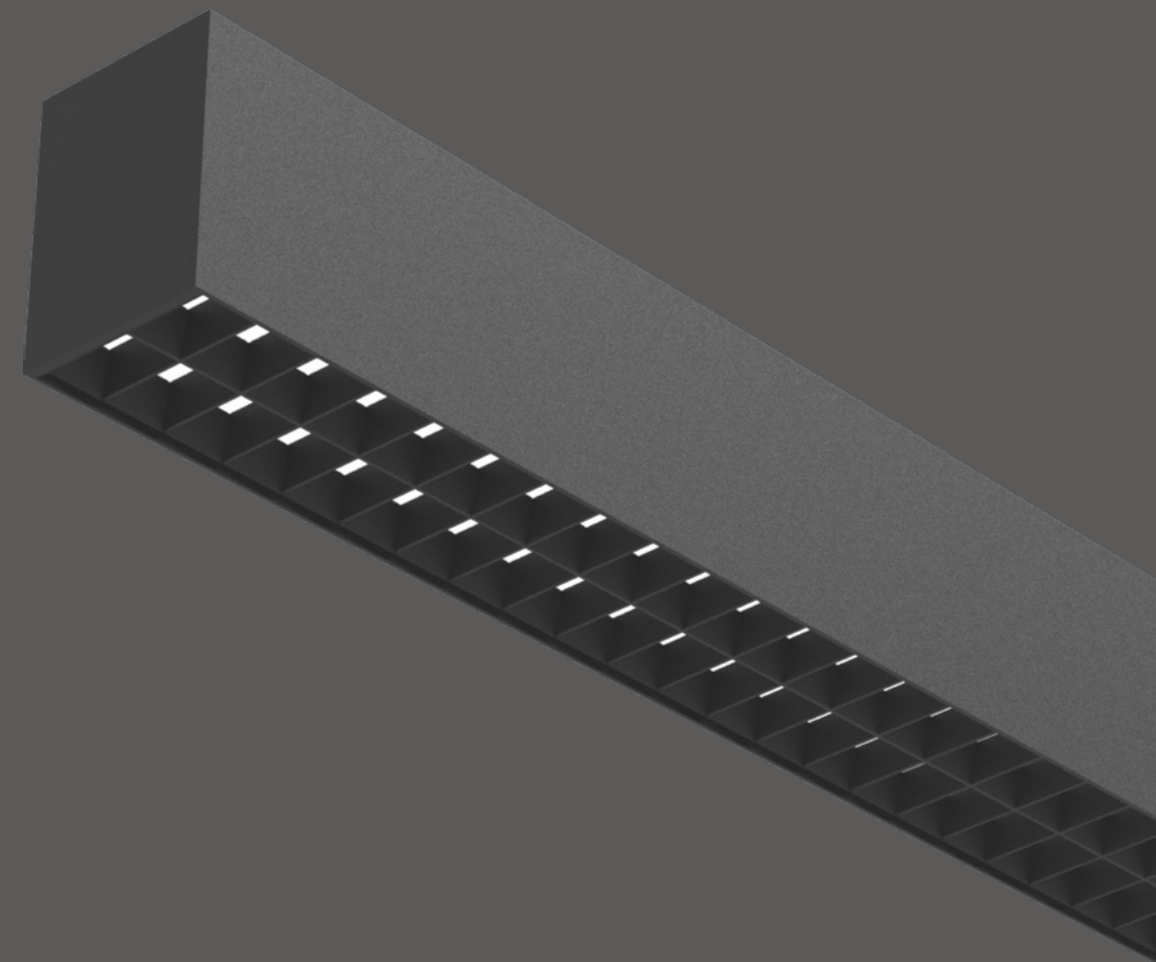


Unique optical design

Glare free and comfortable light($UGR < 13$, $L65 < 1000 \text{ cd/m}^2$)



Direct light



Indirect light/Direct light


Lockable connector

Fast and seamless connection without tool needed.




Removable indirect light

Enhance uniformity and decrease glare

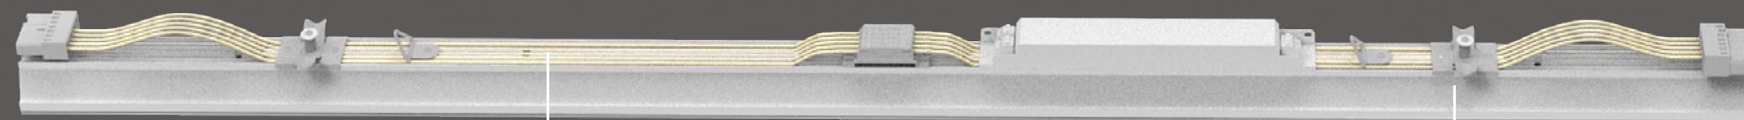












Through-wiring arrangement

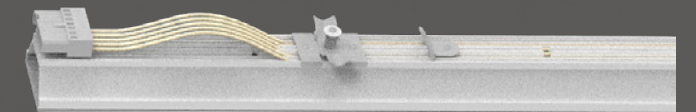


Rotatable bracket

Easily assemble and disassemble the gear tray


Overview

Mounting	Control	Dimensions	Configuration	Optics	CCT	Lumen	Color&Finish
 Recessed  Pendant  Surface-mounted	 ON/OFF  DALI  Push Dimming  CCT Tunable  Casambi  Human Centric Lighting  Sensor	 1200mm  1500mm  3000mm	 Individual  Continuous	 Direct light  Indirect light/Direct light  Direct light  Indirect light/Direct light	 3000K  4000K  3000K-6500K	1200mm  3200lm(Direct light)  1600lm↑+3200lm↓ 1500mm  4000lm(Direct light)  2000lm↑+4000lm↓ 3000mm  8000lm(Direct light)  4000lm↑+8000lm↓	 Black (RAL9005)  White (RAL9016)

LINC Linear light

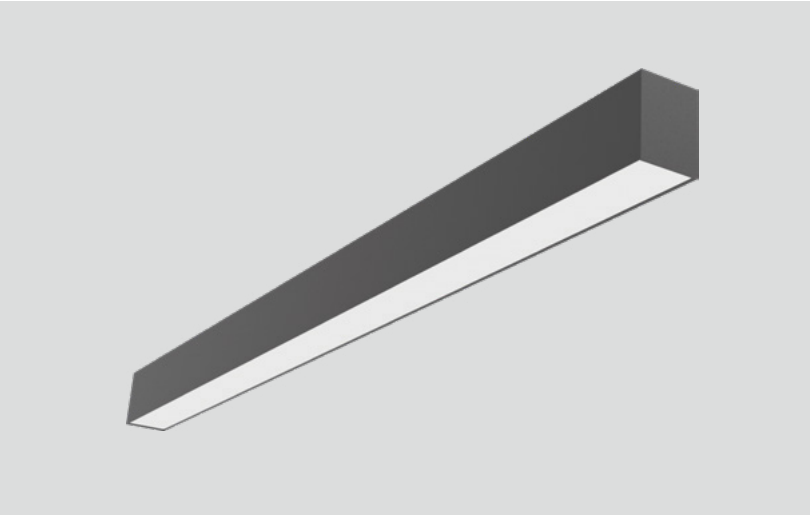

High efficacy of more than 150LM/W.
Seamless connection without light leakage.
Fast installation and easy maintenance.
EN12464-1 compliant.
Shining free and uniform light.
Dot free illumination and screwless end cap.

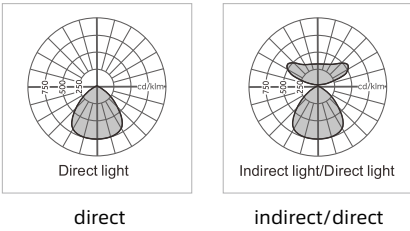

Optical			
direct Lumen	3200lm@1200mm	CCT	3000K,4000K,3000-6500K
	4000lm@1500mm	SDCM	< 3
	8000lm@3000mm	CRI	90Ra
indirect/direct Lumen	4800lm(1600lm ↑ +3200lm ↓)@1200mm	Beam angle	80° & 80° ↓ ,140° ↑
	6000lm(2000lm ↑ +4000lm ↓)@1500mm	UGR	<19
	12000lm(4000lm ↑ +8000lm ↓)@3000mm		


Electrical			
Input Voltage	200-240V,120-270V	Efficiency	150lm/W@90Ra
direct Power Consumption	21W@1200mm,27W@1500mm 53W@3000mm	THD	<10%
indirect/direct Power Consumption	32W@1200mm,40W@1500mm 80W@3000mm	Power Factor	0.95

System			
Lifespan	50000H(L90/B10)	Size	1200mm,1500mm,3000mm
Operating Temperature	-25° C to +40° C	Color	Black(RAL9005),white(RAL9016)
Protection	IP40/IK08	Warranty	5years


Application

Office,Education,Communication area


Dimension

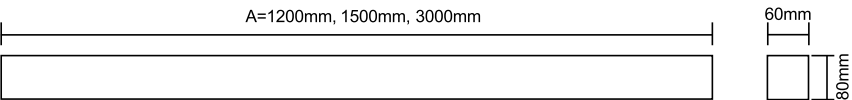

PARA Linear lights direct

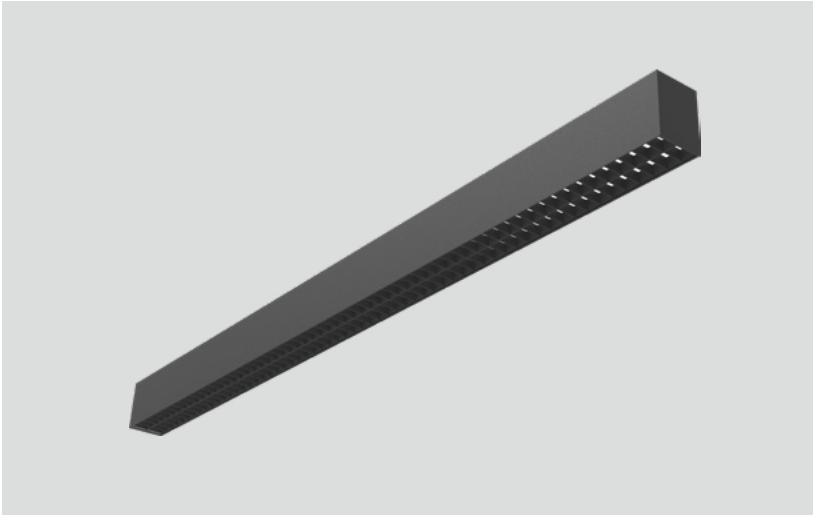

High efficacy of more than 130LM/W.
Seamless connection without light leakage.
Fast installation and easy maintenance.
EN12464-1 compliant.
Shining free and uniform light.
Dot free illumination and screwless end cap.

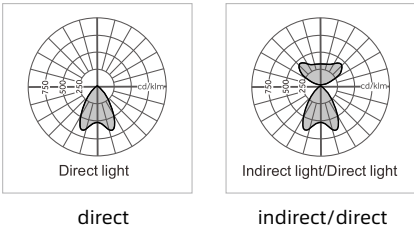

Optical			
direct Lumen	3200lm@1200mm	CCT	3000K,4000K,3000-6500K
	4000lm@1500mm	SDCM	< 3
	8000lm@3000mm	CRI	90Ra
indirect/direct Lumen	4800lm(1600lm ↑ +3200lm ↓)@1200mm	Beam angle	70° & 70° ↓ ,140° ↑
	6000lm(2000lm ↑ +4000lm ↓)@1500mm	UGR	<16 & <13
	12000lm(4000lm ↑ +8000lm ↓)@3000mm		


Electrical			
Input Voltage	200-240V,120-270V	Efficiency	130lm/W@90Ra
direct Power Consumption	25W@1200mm,31W@1500mm 62W@3000mm	THD	<10%
indirect/direct Power Consumption	30W@1200mm,46W@1500mm 92W@3000mm	Power Factor	0.95


System			
Lifespan	50000H(L90/B10)	Size	1200mm,1500mm,3000mm
Operating Temperature	-25° C to +40° C	Color	Black(RAL9005),WHITE(RAL9016)
Protection	IP40/IK08	Warranty	5years

Application

Office,Education,Communication area

Dimension


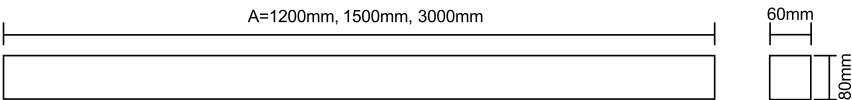


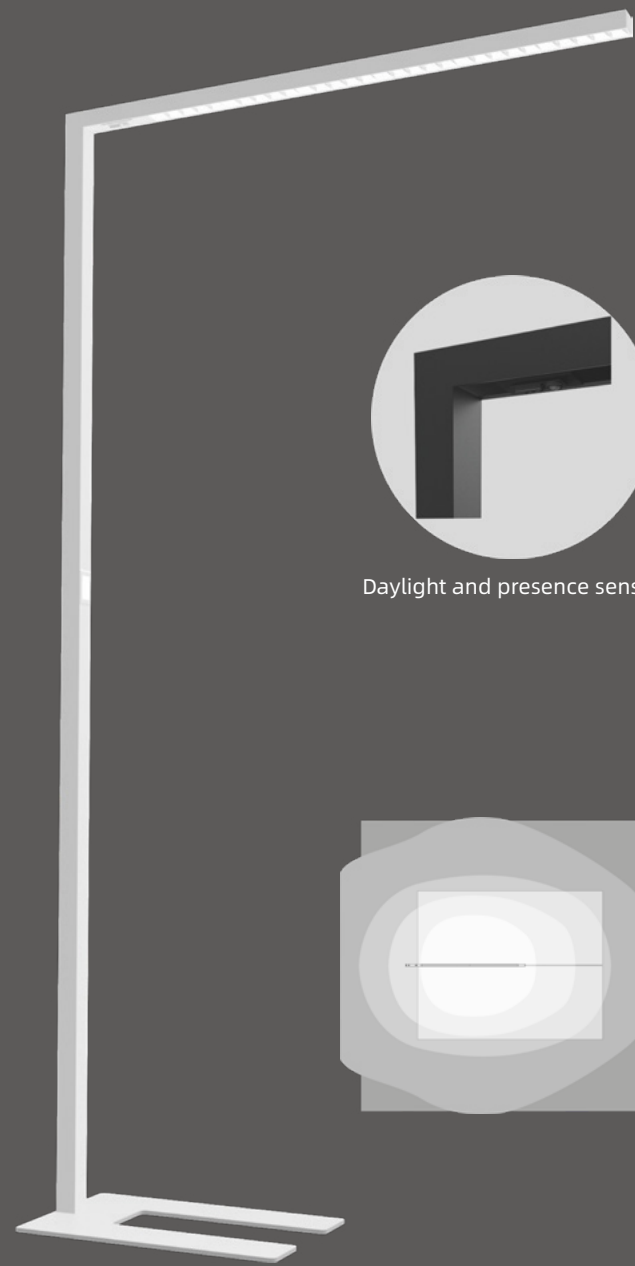

Daylight and presence sensor




Dim by touch screen

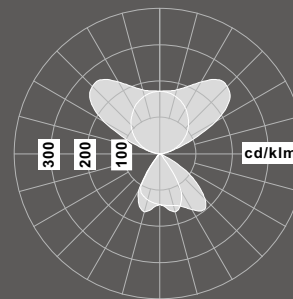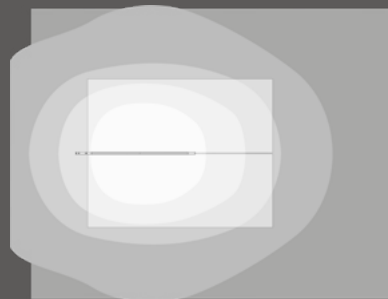


TASC
Flexible and individual

TASC Free-standing luminaire

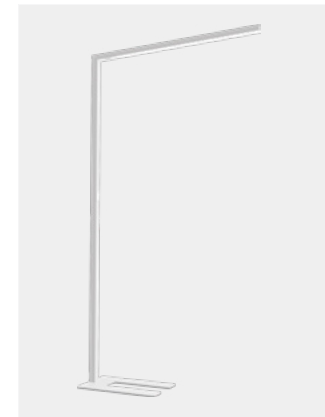


Dimension




TASC Desk-mounted luminaire



Dimension

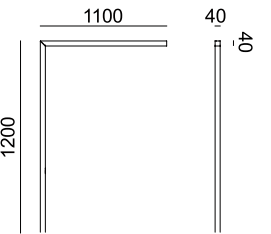

High efficacy of more than 125LM/W.
Fast installation and easy maintenance.
Optimum glare control.
Shining free and uniform light.
Individual control and flexible application




Optical			
Lumen	7500lm	CCT	3000K,4000K,3000-6500K
		SDCM	< 3
		CRI	90Ra
		Beam angle	70° ↓ ,140° ↑
		UGR	<16
Electrical			
Input Voltage	200-240V	Efficiency	125lm/w
Power Consumption	60W	THD	<10%
		Power Factor	0,95
System			
Lifespan	50000H(L90/B10)	Size	/
Operating Temperature	-25° C to +40° C	Color	Black(RAL9005),white(RAL9016)
Protection	IP20/IK05	Warranty	5years

Application



Open office and individual office

DISC

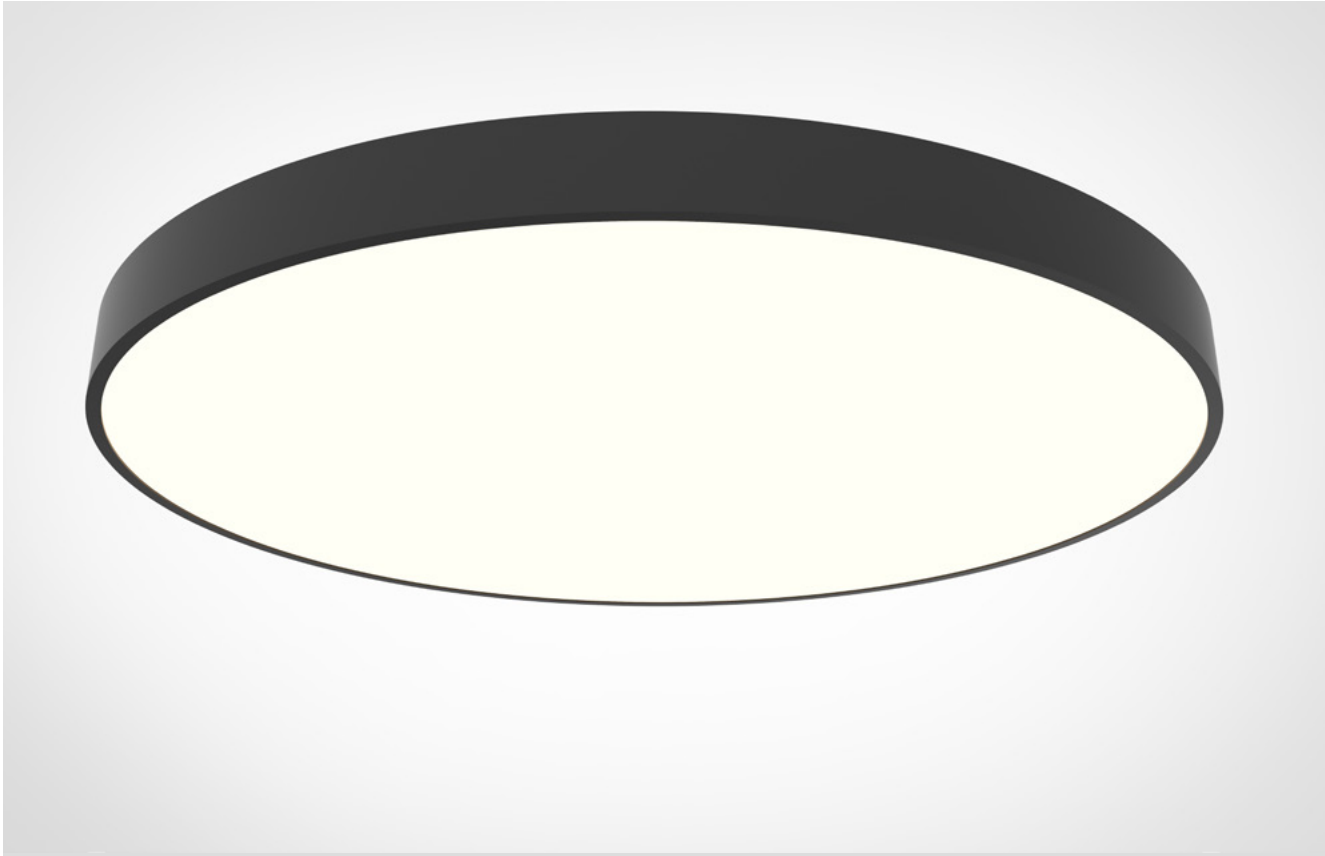


604 160

Light Source	LED
Power	15W+25W
CCT	2700K/3000K/3500K 4000K/5500K
CRI	>90
Input Voltage	220-240v
Beam Angle	120°
Finishing color	White,Black,Silver

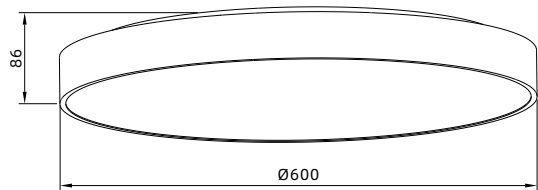

604 190

Light Source	LED
Power	15W+45W
CCT	2700K/3000K/3500K/4000K 5500K
CRI	>90
Input Voltage	220-240v
Beam Angle	120°
Finishing color	White,Black,Silver

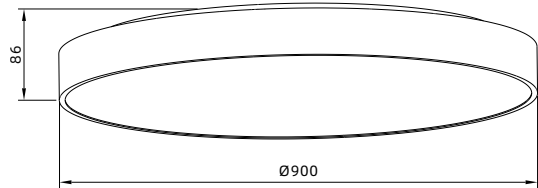


Patented Product, Counterfeiting Not Allowed




604 360

Light Source	LED
Power	15W+25W
CCT	2700K/3000K/3500K 4000K/5500K
CRI	>90
Input Voltage	220-240v
Beam Angle	120°
Finishing color	White,Black,Silver



604 390















Light Source	LED
Power	15W+45W
CCT	2700K/3000K/3500K/4000K 5500K
CRI	>90
Input Voltage	220-240v
Beam Angle	120°
Finishing color	White,Black,Silver



Patented Product, Counterfeiting Not Allowed

STAIR LAMP

The source of safety at night, this inconspicuous glow embodies the ritual of returning home, making every step infinitely romantic. Featuring high-quality light sources and high color rendering index, it provides uniform and aesthetically pleasing illumination. With various styles and installation methods, it adapts to different spatial design needs.

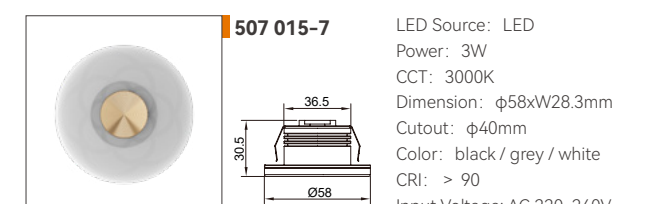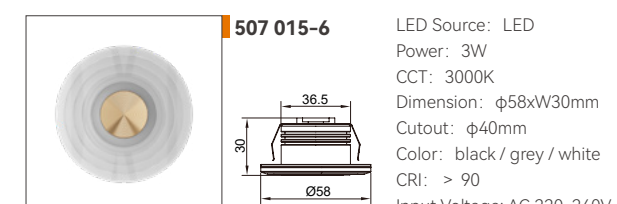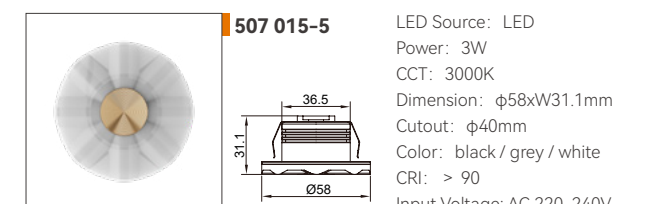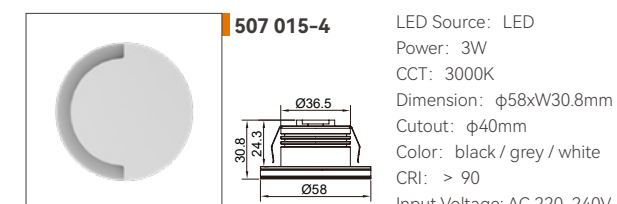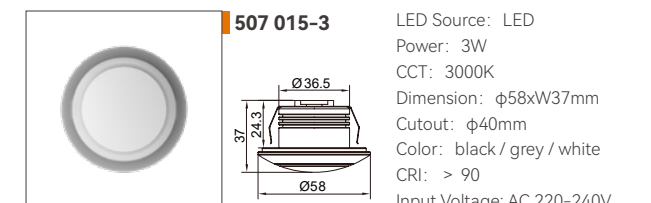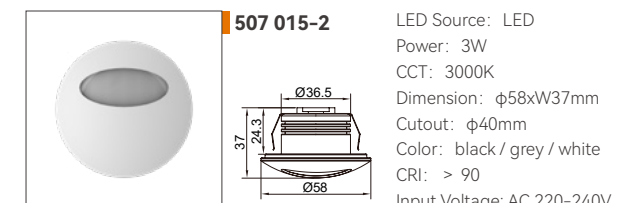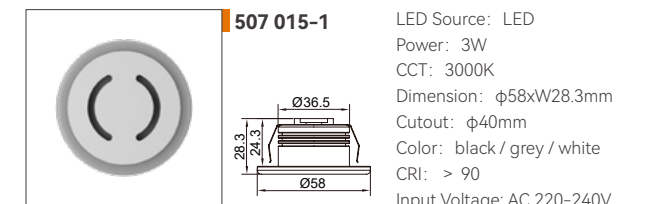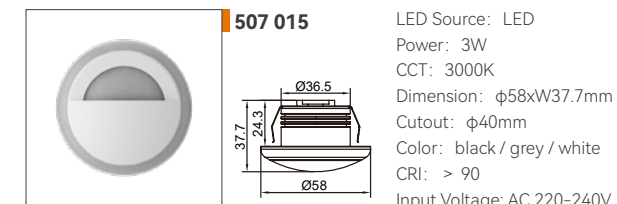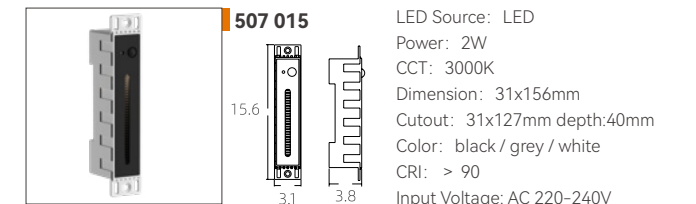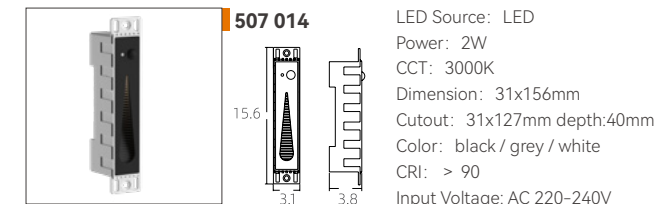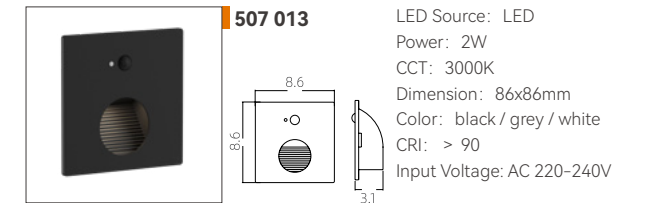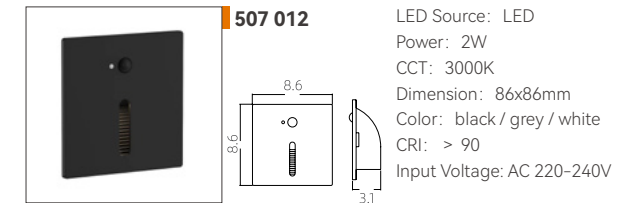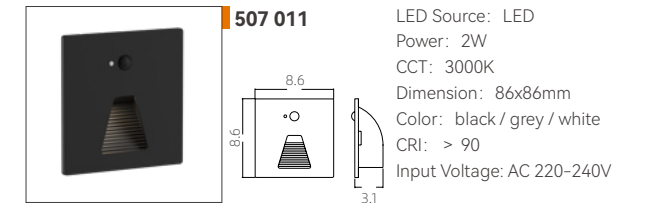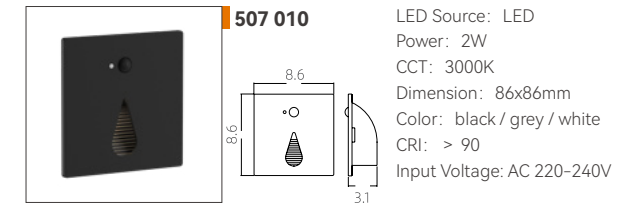

Note: The product images included in this brochure may have slight variations from the actual product without prior notice, and the final actual product shall prevail.